


Preliminary Data sheet

**NOVOTURN
Multi-turn Sensor
Non-contacting**

**MC1-2800
Ratiometric
Industrial**



Special Features

- Non-contacting, magnetic
- Long life
- Measuring range 15840° (44 turns)
- True-Power-On system: counts turns even when not powered. Patented non-volatile technology does not require gears or batteries
- Available with push-on coupling or marked shaft
- Easy mounting
- Protection class IP54 up to IP67
- Resolution 16 bits per revolution
- Other configurations see separate data sheets

Applications

- Mechanical engineering
- Mobile machinery
- Driveline or steering systems
- Wire-actuated encoders
- Gate drives
- Motor sports

Multi-turn sensors that use the GMR technology (giant magneto resistance), provide absolute position values, do not require any reference signals and need no power supply or buffer battery for detecting the revolutions. The fact that rotations are detected even unpowered and the sensor does not lose its position information during a power failure, makes the MC1-2800 with its diameter of only 30 mm an extremely compact real True-Power-On rotary sensor.

The sensor operates magnetically and thus contactless allowing an extremely long life.

The sensor is able to detect angular positions over up to 44 revolutions with a high resolution up to 16 bits per revolution.

Description

Material	Housing: high grade, temperature resistant plastic PPS-GF Shaft: stainless steel, X8CrNiS18-9 1.4305
Mounting	With 2 screws M4 and washers
Fastening torque of mounting	140 ± 40 Ncm
Bearing	Sintered bronze bushing
Electrical connection	Cable 4x 0.5 mm ² (AWG 20), TPE, shielded / Connector M12x1, A-coded with cable L = 0.15 m

Mechanical Data

Dimensions	See dimension drawing
Mechanical travel	continuous
Permitted shaft load static or dynamic	20 N (axial / radial)
Torque	Typ. ≤ 3 Ncm Depending on the environmental temperature and standstill time, the necessary force for the initial operating of the shaft may increase
Weight	approx. 50 g

Ordering Specifications

Ordering Specifications

Preferred types printed in bold

- Delivery time up to 25 pcs. within 10 working days EXW
- Best low-volume pricing

Supply voltage Ub

2: Ub = 5 VDC

Interface parameters

- 1: 5 ... 95% ratiometric to supply voltage Ub (0.25 ... 4.75 VDC)
2: 10 ... 90% ratiometric to supply voltage Ub (0.5 ... 4.5 VDC)

Output characteristic

- 1: Rising output characteristic cw
2: Rising output characteristic ccw
Other output characteristics on request

Electrical connection

- 202: Cable, 4-pole, shielded, L = 1 m
206: Cable, 4-pole, shielded, L = 3 m
210: Cable, 4-pole, shielded, L = 5 m
501: Connector M12x1, 4-pin, with cable, shielded, L = 0.15 m
Cable versions and assembled connectors on request

M C 1 - 2 8 3 2 - 0 1 0 - 2 1 1 - 2 0 2

Series

Number of turns for output characteristic



001 ... 044: 1 up to 44 turns
Increment 1 turn, X turns correspond to a measuring angle of $X \cdot 360^\circ$
001, 003, 006, 010, 016, 025, 044: 1, 3, 6, 10, 16, 25, 44 turns
Other measuring angles on request

Mechanical version

2802: 6 mm shaft with flattening, IP54
2832: 6 mm shaft with flattening, IP65
2862: 6 mm shaft with flattening, IP67
2821: push-on coupling, IP54
2841: push-on coupling, IP65
2871: push-on coupling, IP67
Other shaft configurations on request

Drawing

CAD data see
www.novotechnik.de/en/download/cad-data/

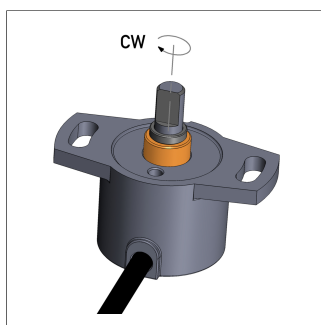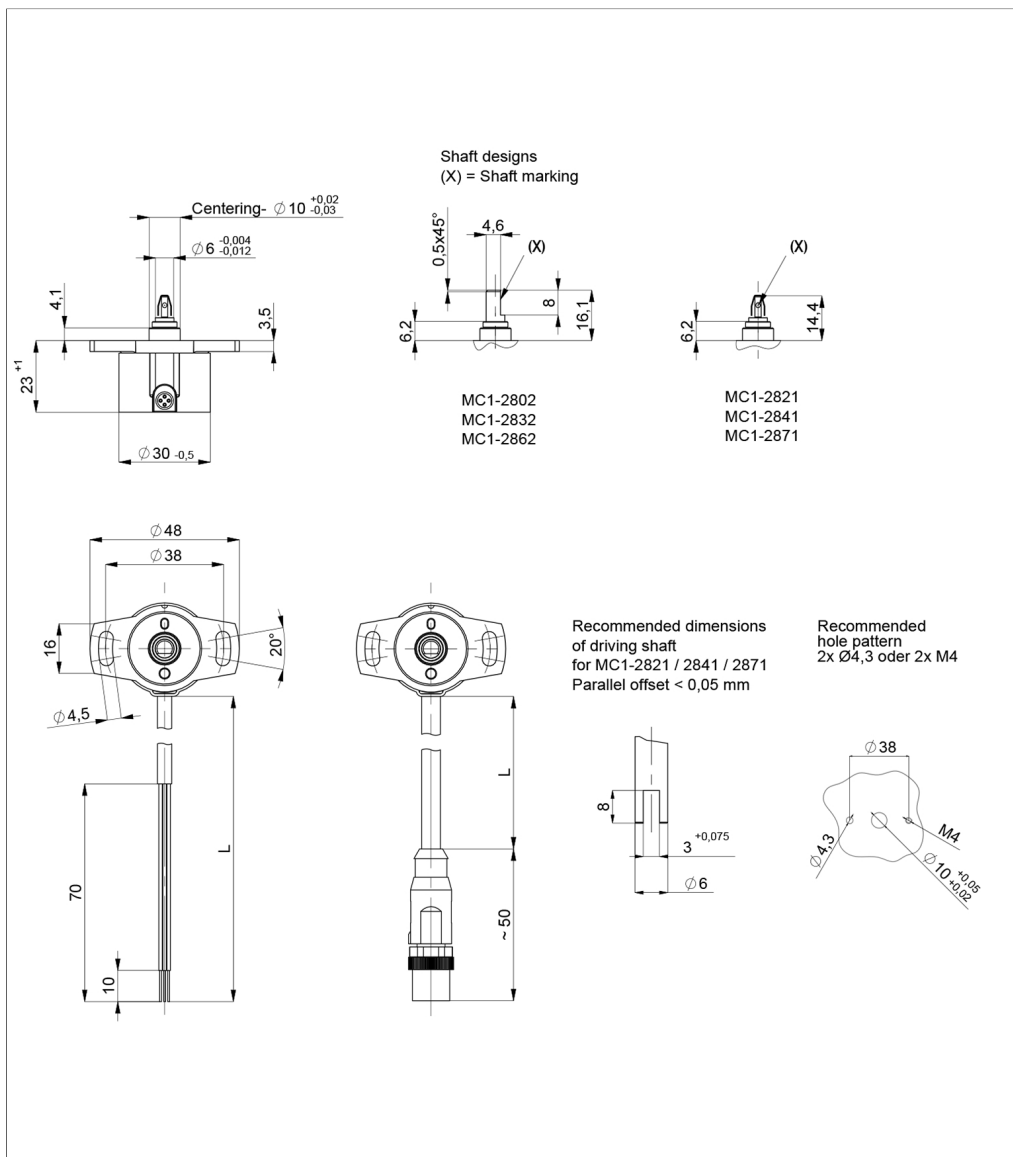

When the marking of the shaft is pointing towards the electrical outlet, the sensor output is located on an integer turn position.

Technical Data


Type	MC1-____-2-____ Ratiometric
Output signal	ratiometric to supply voltage U_b 5 ... 95% (0.25 ... 4.75 V) 10 ... 90% (0.5 ... 4.5 V)
Load	$\geq 10 \text{ k}\Omega$
Diagnosis	activated (in case of error, output signal is outside of the plausible signal range)
Update rate	tbd
Measuring range	0 ... 360° up to 0 ... 15840° in 360°-steps (1 to 44 turns)
Independent linearity *	1 turn: tbd 3 turns: typ. $\leq \pm 0.167 \text{ %FS}$, max. $\leq \pm 0.267 \text{ %FS}$ 6 turns: typ. $\leq \pm 0.083 \text{ %FS}$, max. $\leq \pm 0.183 \text{ %FS}$ 10 turns: typ. $\leq \pm 0.05 \text{ %FS}$, max. $\leq \pm 0.15 \text{ %FS}$ 16 turns: typ. $\leq \pm 0.031 \text{ %FS}$, max. $\leq \pm 0.131 \text{ %FS}$ 44 turns: tbd
Resolution	16 bits over the entire measuring range
Repeatability *	$\leq \pm 0.1^\circ$
Hysteresis *	$\leq \pm 0.5^\circ$
Temperature error	$\pm 0.15 \text{ %FS}$
Supply voltage U_b	5 VDC (4.5 ... 5.5 VDC)
Current consumption w/o load	$\leq 50 \text{ mA}$
Overvoltage protection	24 VDC (60 min.)
Polarity protection	yes (supply lines)
Short circuit protection	yes (output vs. GND and supply voltage)
Insulation resistance (500 VDC)	$\geq 10 \text{ M}\Omega$ *) For the MC1-2821/2841/2871 models with push-on coupling, the values can change mechanically caused (up to a factor of 2) if the recommended dimensions of driving shaft is not adhered to or if installed excentric or after numerous plug-in cycles.
Environmental Data	
Max. operational speed	800 rpm
Vibration IEC 60068-2-6	20 g, 5 ... 2000 Hz, $A_{max} = 0.75 \text{ mm}$
Shock IEC 60068-2-27	50 g, 6 ms
Protection class DIN EN 60529	IP54 / IP65 / IP67
Operating temperature	-40 ... +85°C -25 ... +85°C (connector M12)
Insensitivity to magnetic DC fields	$< 15 \text{ mT}$
Life	$> 50 \text{ Mio. movements (mechanically)}$
Functional safety	If you need assistance in using our products in safety-related systems, please contact us
MTTF (IEC 60050)	$> 20 \text{ years}$
Traceability	Serial number on type labeling: production batch of the sensor assembly and relevant sensor components
Conformity/Approval	CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/
EMC Compatibility	
EN 61000-4-2 ESD (contact/air discharge)	4 kV, 8 kV
EN 61000-4-3 Electromagnetic fields (RFI)	10 V/m
EN 61000-4-4 Fast transients (burst)	1 kV
EN 61000-4-6 Cond. disturbances (HF fields)	10 V eff.
EN 55016-2-3 Radiated disturbances	Industrial and residential area

Important:


While operation, care should be taken not to rotate the sensor shaft below 0° or above 15840°. Refer to users manual.
FS = Full scale: Signal span according to electrical measuring range

Connection Assignment

Signal	Cable code 2_ _	Connector code 5_ _
Supply voltage Ub	GN	Pin 1
GND	BN	Pin 3
Signal output	WH	Pin 2
Do not connect	YE	Pin 4
Connect cable shielding to protection earth		



Sensor Mounting

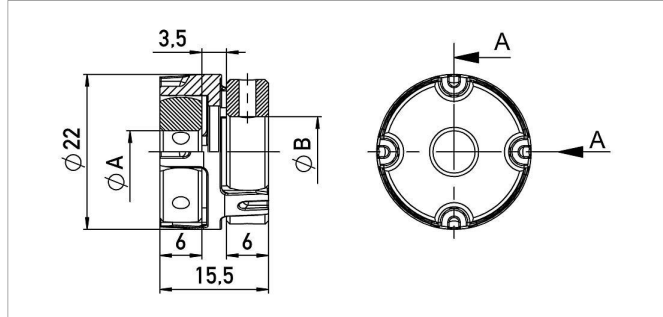

Z-106-G_

Backlash-free, double cardanic shaft coupling for $\varnothing 6$ mm to $\varnothing 6$ mm, $\varnothing 6.35$ mm or $\varnothing 10$ mm, mounting via 2 threaded pins with internal hexagon

Material Aluminium, PEEK

Operating temp. $-40 \dots +160^\circ\text{C}$




Transferable torque ≤ 1 Nm

torque

Displacement rad. ≤ 0.1 mm, angl. $\leq 0.45^\circ$

P/N	Type	$\varnothing A / \varnothing B$ [mm]
400103910	Z-106-G-6	6 / 6
400103912	Z-106-G-6,35	6 / 6.35
400103913	Z-106-G-10	6 / 10

Connector System M12

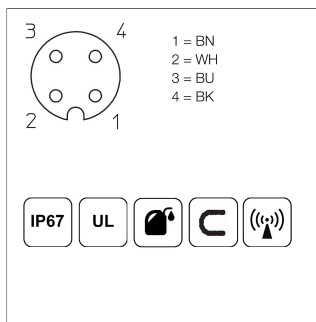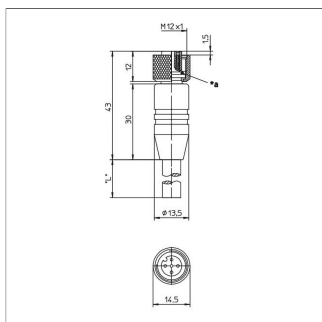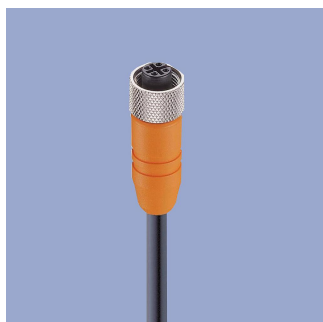

EEM-33-32/62/97
M12x1 Mating female connector, 4-pin, straight, A-coded, with molded cable, shielded, IP67, open ended

Plug housing PA
Cable sheath PUR, Ø = max. 6 mm, -25 ... +80°C (moved), -50 ... +80°C (fixed)

Lead wires PP, 0.34 mm²

P/N	Type	Length
400005600	EEM-33-32	2 m
400005609	EEM-33-62	5 m
400005650	EEM-33-97	10 m

IP67 Protection class IP67 DIN EN 60529

IP68 Protection class IP68 DIN EN 60529

EMC Very good Electromagnetic Compatibility (EMC) and shield systems

UL Very good resistance to oils, coolants and lubricants

C Suited for applications in dragchains


UL UL - approved

CAN CAN-Bus

Connecting Options on request



- M12 connector**
- Customized lengths
 - 3-, 4-, 6- and 8-pole versions
 - Protection class IP68
 - Ordering codes of standard versions see ordering specifications

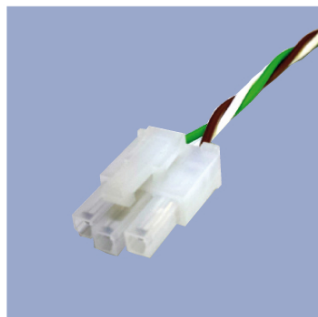

- Molex Mini Fit jr.**
- Customized length and lead wires
 - 3-, 4- and 6-pole versions
 - On request



- Tyco AMP Super Seal**
- Pin- and bushing housing
 - Customized lengths
 - 3-, 4- and 6-pole versions
 - Protection class IP67
 - On request



- Molex Mini Fit jr.**
- Customized length and lead wires
 - 3-, 4- and 6-pole versions
 - On request



- Deutsch DTM 04**
- Pin- and bushing housing
 - Customized lengths
 - 3-, 4- and 6-pole versions
 - Protection class IP67
 - On request



- ITT Cannon Sure Seal connector**
- Customized lengths
 - 3-, 4- and 6-pole versions
 - Protection class IP67
 - On request

Novotechnik
Messwertaufnehmer OHG
P.O.Box 4220
73745 Ostfildern (Germany)
Horbstrasse 12
73760 Ostfildern (Germany)
Phone +49 711 4489-0
Fax +49 711 4489-118
info@novotechnik.de
www.novotechnik.de



© Apr 15, 2024

The specifications contained in our datasheets are intended solely for informational purposes. The documented specification values are based on ideal operational and environmental conditions and can vary significantly depending on the actual customer application. Using our products at or close to one or more of the specified performance ranges can lead to limitations regarding other performance parameters. It is therefore necessary that the end user verifies relevant performance parameters in the intended application. We reserve the right to change product specifications without notice.