

### NOVOSTRICTIVE Transducer Touchless


TM<sub>1</sub>

Plug-in Flange 4 ... 20 mA

### Industrial





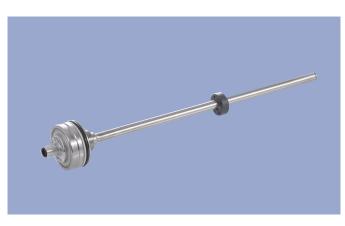

#### **Special Features**

- Compact design for tight spaces
- Touchless magnetostrictive measurement technology
- Operating pressure up to 350 bar, peaks up to 450 bar
- Non-contacting position detection with ring-shaped position marker
- Unlimited mechanical life
- No velocity limit for position marker
- Absolute output
- Outstanding accuracy performance up to 0.04 %
- Wide range of supply voltage
- Optimized for use in industrial applications
- Other configurations see separate data sheets

#### **Applications**

- Manufacturing Engineering
- Level measurement
- Actuators

The absolute linear transducer TM1 enables a compact and cost-effective position measurement. It consists of a stainless steel flange welded to a pressure-resistant rod and can therefore be used under harsh environmental conditions.


The magnetostrictive measuring technology offers excellent accuracy for measuring lengths up to 2000 mm.

The passive ring-shaped position marker allows a mechanically decoupled measurement.

Material	Flange: stainless steel 1.4307 / AISI 304L Flange cover: AlSiMgBi Rod: stainless steel 1.4571 / AISI 316Ti				
				Sealing: O-ring FKM 80, Supporting ring: PTFE	
				Mounting	Plugged and secured in position with set screw M5 ISO 4026
	Electrical connection	Connector M12x1, A-coded / Connector system M12x1, A-coded with lead wires			
Mechanical Data					
Dimensions	See dimension drawing				




# Ordering Specifications

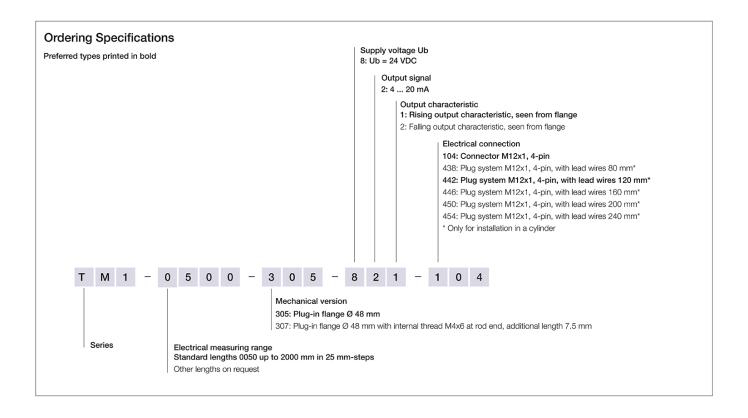



## Drawing

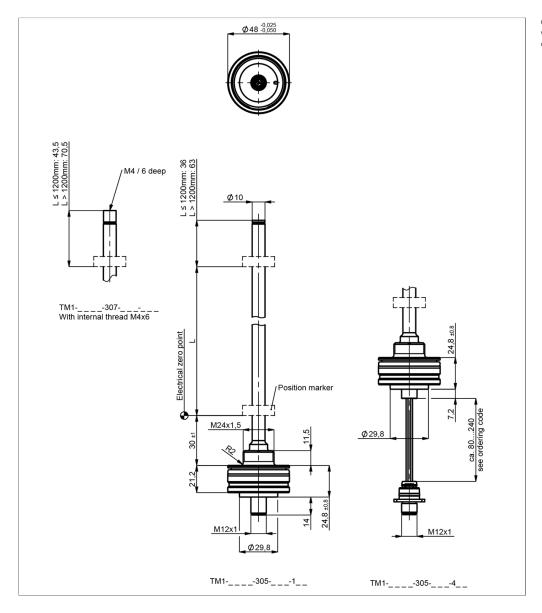

CAD data see www.novotechnik.de/en/download/caddata/



## **Technical Data**

Туре	TM1305-82
Output signal	4 20 mA
Burden	@Ub 24 V: $\leq$ 500 $\Omega$ , @Ub 12 V: $\leq$ 250 $\Omega$
Sampling rate / Update rate	0.5 kHz
Electrical measuring range (dim. L)	0 50 mm up to 0 2000 mm
Absolute linearity	≤ ±0.04 %FS (min. 300 μm)
Tolerance of electr. zero point	±1 mm
Resolution	≤ 0.1 mm
Repeatability	≤ ±0.1 mm
Hysteresis	≤±0.1 mm
Temperature error	typ. 50 ppm/K (min. 0.01 mm/K)
Supply voltage Ub	12/24 VDC (8 32 VDC)
Supply voltage ripple	≤ 10% Ub
Power drain w/o load	<1 W
Overvoltage protection	36 VDC (permanent)
Polarity protection	yes (-36 VDC)
Short circuit protection	yes (output vs GND and supply voltage up to 36 VDC)
Insulation resistance (500 VDC)	≥ 10 MΩ
Environmental Data	
Max. operational speed	Mechanically unlimited
Vibration IEC 60068-2-6	20 g, 10 2000 Hz, Amax = 0.75 mm
Shock IEC 60068-2-27	100 g, 11 ms (single hit)
Protection class DIN EN 60529	IP67 (Connector system M12, fastened, when correctly fitted in cylinder: IP69)
Operating temperature	-40 +105°C, -40 +85°C (connector system M12)
Operating humidity	0 95 % R.H. (no condensation)
Working pressure	≤ 350 bar
Pressure peaks	≤ 450 bar
Burst pressure	> 700 bar
Life	Mechanically unlimited
Functional safety	If you need assistance in using our products in safety-related systems, please contact us
MTTF (IEC 60050)	355 years
EMC Compatibility	•
EN 61000-4-2 ESD (contact/air discharge)	4 kV, 8 kV
EN 61000-4-3 Electromagnetic fields (RFI)	10 V/m
EN 61000-4-4 Fast transients (burst)	1 kV
EN 61000-4-6 Cond. disturbances (HF fields)	10 V eff.
EN 55016-2-3 Radiated disturbances	Industrial and residential area
-	Only for connector system M12: Data applies only inside a cylinder.
	The EMC measurements are conducted in a reference cylinder. The EMC properties can deviate when using different cylinders.
	· · ·

FS = Full scale: Signal span according to electrical measuring range


### Connection Assignment


Connection Assignment		
Signal	Connector	Plug system
	code 1	code 4
Supply voltage Ub	Pin 1	Pin 1
GND	Pin 3	Pin 3
Signal output	Pin 2	Pin 2
Do not connect	Pin 4	Pin 4
	Connect cable shielding to protection	n earth





Technical Data Output Characteristics

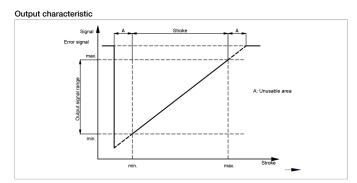


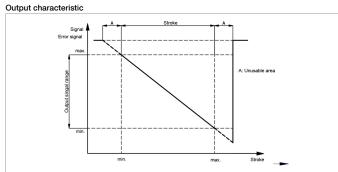



### **Position Markers**



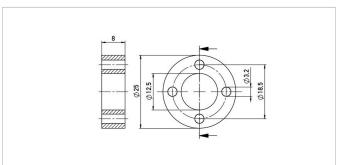

Ring position marker for fixation with screws M3


Material PA6-GF Weight approx. 12 g Operating temp. -40 ... +100°C Surface pressure max. 40 N/mm² Fastening torque max. 100 Ncm

of mounting

P/N Pack. unit [pcs]

400005697



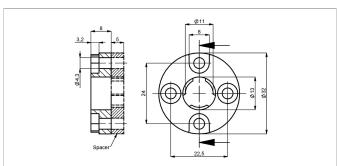

#### Z-TH1-P19

#### Z-TH1-PD19 With spacer


Ring position marker for fixation with screws M4,

optionally with or without spacer

PA6-GF, Spacer: POM-GF Material Weight approx. 14 g Operating temp. -40 ... +100°C Surface pressure max. 40 N/mm² Fastening torque max. 100 Ncm

Pack. unit P/N Spacer [pcs] 400005698 400107117 incl.



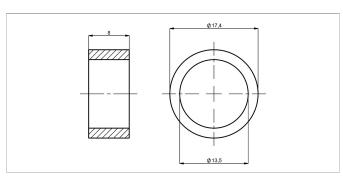

### Z-TH1-P30


Ring position marker for mounting via lock

washer and retaining ring

Material NdFeB bonded (EP) Weight approx. 5 g Operating temp. -40 ... +100°C Surface pressure max. 10 N/mm² P/N Pack. unit [pcs]

400106139



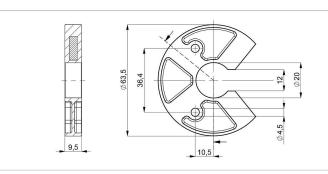

U-shaped position marker for fixation with M4 screws

Caution: for dimension of electrical zero point please follow the user manual!

PA6-GF Operating temp. -40 ... +105°C Surface pressure max. 40 N/mm² Fastening torque max. 100 Ncm


of mounting

Pack. unit [pcs] 400105076



### **Position Markers**



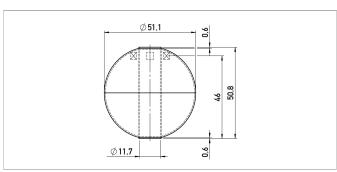

#### Z-TH1-P32

Ball-type floating position marker Material Stainless steel 1.4571 Weight approx. 42 g Operating temp. -40 ... +100°C Compression ≤ 40 bar


strength

720 kg/m<sup>3</sup> Density Immersion depth 36.7 mm

in water

P/N Pack. unit [pcs] 400105703



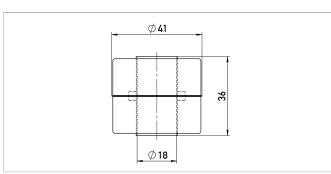


#### Z-TH1-P21

Cylinder floating position marker Stainless steel 1.4404 Material Weight approx. 20 g Operating temp. -40 ... +100°C Compression ≤ 8 bar strength 740 kg/m<sup>3</sup>

Density Immersion depth approx. 26.6 mm

in water

P/N Pack. unit [pcs] 400056044

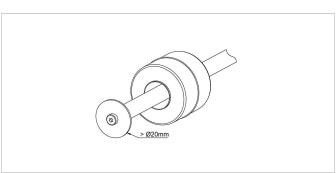


When using floating position markers, we recommend to secure the marker against loss with a washer at the rod end. For this purpose, a sensor version with inner


thread at the rod end is required (s. ordering code).




# Connector System M12

















#### EEM-33-33/63/99

M12x1 Mating female connector, 4-pin, angled, A-coded, with molded cable, shielded, IP67,

open ended

Plug housing PA

Cable sheath PUR,  $\emptyset$  = max. 6 mm, -25 ... +80°C (moved)

-50 ... +80°C (fixed)

Lead wires PP, 0.34 mm<sup>2</sup>

P/N	Туре	Length	
400005601	EEM-33-33	2 m	_
400005610	EEM-33-63	5 m	
400005696	EEM-33-99	10 m	

IP67 Protection class IP67 DIN EN 60529

IP68 Protection class IP68 DIN EN 60529



Very good Electromagnetic Compatibiliy (EMC) and shield systems



Very good resistance to oils, coolants and lubricants



Suited for applications in dragchains



UL - approved





Novotechnik Messwertaufnehmer OHG P.O.Box 4220 73745 Ostfildern (Germany) Horbstrasse 12 73760 Ostfildern (Germany) Phone +49 711 4489-0 Fax +49 711 4489-118 info@novotechnik.de www.novotechnik.de



© Jul 18, 2022