

NOVOSTRICTIVE Transducer **Touchless**

TM₁


Plug-in Flange Voltage

Industrial









Special Features

- Compact design for tight spaces
- Touchless magnetostrictive measurement technology
- Operating pressure up to 350 bar, peaks up to 450 bar
- Non-contacting position detection with ring-shaped position
- Unlimited mechanical life
- No velocity limit for position marker
- Absolute output
- Outstanding accuracy performance up to 0.04 %
- Wide range of supply voltage
- Optimized for use in industrial applications
- Other configurations see separate data sheets

Applications

- Manufacturing Engineering
- Level measurement
- Actuators

The absolute linear transducer TM1 enables a compact and cost-effective position measurement. It consists of a stainless steel flange welded to a pressure-resistant rod and can therefore be used under harsh environmental conditions.


The magnetostrictive measuring technology offers excellent accuracy for measuring lengths up to 2000 mm.

The passive ring-shaped position marker allows a mechanically decoupled measurement.

Description	
Material	Flange: stainless steel 1.4307 / AISI 304L
	Flange cover: AlSiMgBi
	Rod: stainless steel 1.4571 / AISI 316Ti
	Sealing: O-ring FKM 80, Supporting ring: PTFE
Mounting	Plugged and secured in position with set screw M5 ISO 4026
Electrical connection	Connector M12x1, A-coded / Connector system M12x1, A-coded with lead wires
Mechanical Data	
Dimensions	See dimension drawing




Ordering Specifications

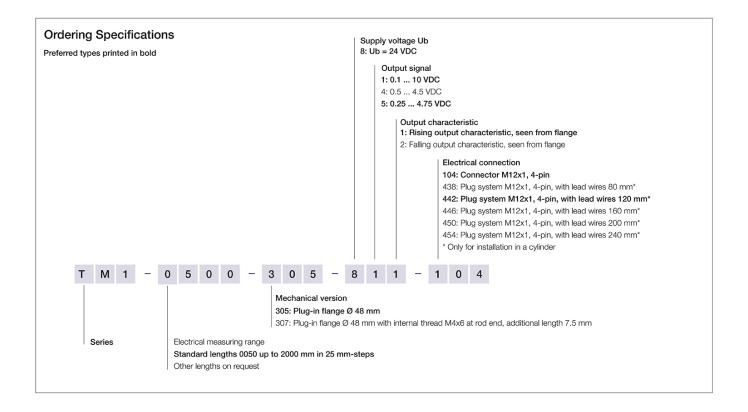



Drawing

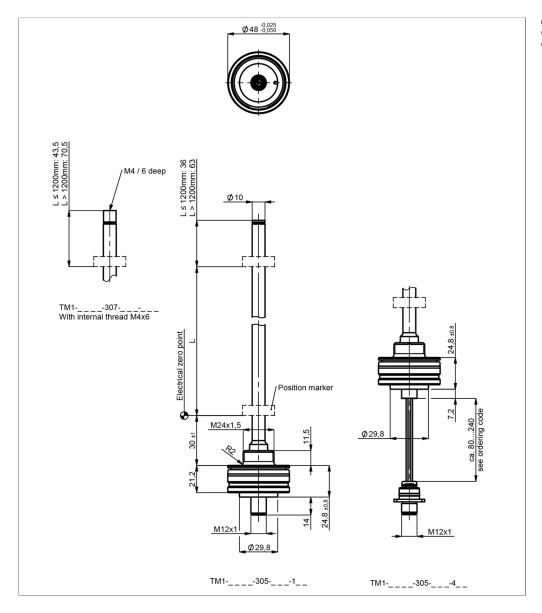

CAD data see www.novotechnik.de/en/download/caddata/



Technical Data

Туре	TM1305-84	TM1305-81
	TM1305-85	
Output signal	0.25 4.75 V	0.1 10 V
	0.5 4.5 V	
Load	≥ 10 kΩ	
Sampling rate / Update rate	0.5 kHz	
Electrical measuring range (dim. L)	0 50 mm up to 0 2000 mm	
Absolute linearity	≤ ±0.04 %FS (min. 300 µm)	
Tolerance of electr. zero point	±1 mm	
Resolution	≤ 0.1 mm	
Repeatability	≤ ±0.1 mm	
Hysteresis	≤ ±0.1 mm	
Temperature error	typ. 50 ppm/K (min. 0.01 mm/K)	
Supply voltage Ub	12/24 VDC (8 32 VDC)	24 VDC (16 34 VDC)
Supply voltage ripple	≤ 10% Ub	
Power drain w/o load	< 1 W	
Overvoltage protection	36 VDC (permanent)	
Polarity protection	yes (-36 VDC)	
Short circuit protection	yes (output vs GND and supply voltage up to 36 VDC	
Insulation resistance (500 VDC)	≥ 10 MΩ	
Environmental Data		
Max. operational speed	Mechanically unlimited	
Vibration IEC 60068-2-6	20 g, 10 2000 Hz, Amax = 0.75 mm	
Shock IEC 60068-2-27	100 g, 11 ms (single hit)	
Protection class DIN EN 60529	IP67 (Connector system M12, fastened, when correct	
Operating temperature	-40 +105°C, -40 +85°C (connector system M12)	
Operating humidity	0 95 % R.H. (no condensation)	
Working pressure	≤ 350 bar	
Pressure peaks	≤ 450 bar	
Burst pressure	> 700 bar	
Life	Mechanically unlimited	
Functional safety	If you need assistance in using our products in safety-	related systems, please contact us
MTTF (IEC 60050)	346 years	346 years
EMC Compatibility		
EN 61000-4-2 ESD (contact/air discharge)	4 kV, 8 kV	
EN 61000-4-3 Electromagnetic fields (RFI)	10 V/m	
EN 61000-4-4 Fast transients (burst)	1 kV	
EN 61000-4-6 Cond. disturbances (HF field	s) 10 V eff.	
EN 55016-2-3 Radiated disturbances	Industrial and residential area	
	Only for connector system M12: Data applies only ins	
	The EMC measurements are conducted in a reference	e cylinder. The EMC properties can deviate when using different cylinders.

 $\mathsf{FS} = \mathsf{Full}$ scale: Signal span according to electrical measuring range


Connection Assignment


oom oo nom / toolgrinnerit		
Signal	Connector	Plug system
	code 1	code 4
Supply voltage Ub	Pin 1	Pin 1
GND	Pin 3	Pin 3
Signal output	Pin 2	Pin 2
Do not connect	Pin 4	Pin 4
	Connect cable shielding to protection earth	





Technical Data Output Characteristics

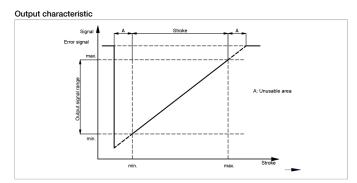






Position Markers





Ring position marker for fixation with screws M3


Material PA6-GF Weight approx. 12 g Operating temp. -40 ... +100°C Surface pressure max. 40 N/mm² Fastening torque max. 100 Ncm

of mounting

P/N Pack. unit [pcs]

400005697





Z-TH1-P19

Z-TH1-PD19 With spacer


Ring position marker for fixation with screws M4,

optionally with or without spacer

PA6-GF, Spacer: POM-GF Material Weight approx. 14 g Operating temp. -40 ... +100°C Surface pressure max. 40 N/mm² Fastening torque max. 100 Ncm

Pack. unit P/N Spacer [pcs] 400005698 400107117 incl.





Z-TH1-P30


Ring position marker for mounting via lock

washer and retaining ring

Material NdFeB bonded (EP) Weight approx. 5 g Operating temp. -40 ... +100°C Surface pressure max. 10 N/mm² P/N Pack. unit [pcs]

400106139





U-shaped position marker for fixation with M4 screws

Caution: for dimension of electrical zero point please follow the user manual!

PA6-GF Operating temp. -40 ... +105°C Surface pressure max. 40 N/mm² Fastening torque max. 100 Ncm


of mounting

Pack. unit [pcs] 400105076



Position Markers





Z-TH1-P32

Ball-type floating position marker Material Stainless steel 1.4571 Weight approx. 42 g Operating temp. -40 ... +100°C Compression ≤ 40 bar


strength

720 kg/m³ Density Immersion depth 36.7 mm

in water

P/N Pack. unit [pcs] 400105703






Z-TH1-P21

Cylinder floating position marker Stainless steel 1.4404 Material Weight approx. 20 g Operating temp. -40 ... +100°C Compression ≤ 8 bar strength 740 kg/m³

Density Immersion depth approx. 26.6 mm

in water

P/N Pack. unit [pcs] 400056044




When using floating position markers, we recommend to secure the marker against loss with a washer at the rod end. For this purpose, a sensor version with inner


thread at the rod end is required (s. ordering code).




Connector System M12

















EEM-33-33/63/99

M12x1 Mating female connector, 4-pin, angled, A-coded, with molded cable, shielded, IP67,

open ended

Plug housing PA

Cable sheath PUR, \emptyset = max. 6 mm, -25 ... +80°C (moved)

-50 ... +80°C (fixed)

Lead wires PP, 0.34 mm²

P/N	Туре	Length	
400005601	EEM-33-33	2 m	_
400005610	EEM-33-63	5 m	
400005696	EEM-33-99	10 m	

IP67 Protection class IP67 DIN EN 60529

IP68 Protection class IP68 DIN EN 60529



Very good Electromagnetic Compatibiliy (EMC) and shield systems



Very good resistance to oils, coolants and lubricants



Suited for applications in dragchains



UL - approved





Novotechnik Messwertaufnehmer OHG P.O.Box 4220 73745 Ostfildern (Germany) Horbstrasse 12 73760 Ostfildern (Germany) Phone +49 711 4489-0 Fax +49 711 4489-118 info@novotechnik.de www.novotechnik.de



© Jul 20, 2022