

NOVOSTRICTIVE Transducer Touchless

TM₁


Plug-in Flange 4 ... 20 mA

Mobile Applications







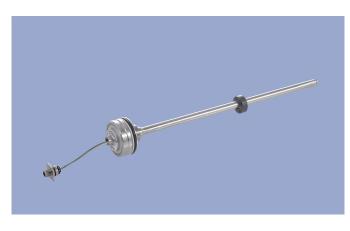

Special Features

- For integration in pneumatic and hydraulic cylinders
- Touchless magnetostrictive measurement technology
- Operating pressure up to 350 bar, peaks up to 450 bar
- Ring-shaped position marker does not contact sensor
- Unlimited mechanical life
- No velocity limit for position marker
- Absolute output
- Outstanding accuracy performance up to 0.04 %
- Wide range of supply voltage
- Optimized for use in mobile applications with highest EMC requirements such as ISO pulses and high interferences to ISO 11452, exceeds E1 requirements
- Other configurations see separate data sheets

Applications

Hydraulic or pneumatic cylinders in

- Agricultural and forestry machinery
- Construction machines
- Vehicles with loading and unloading devices
- Vehicles with extension arms

The absolute position transducer can be used directly in-cylinder and thus enables a compact and cost-effective position measurement. The sensor consists of a stainless steel flange welded to a pressure tight rod and can therefore be used in harsh environments.


The magnetostrictive measuring technology offers excellent accuracy for measuring lengths up to 2000 mm.

The passive ring-shaped position marker allows a mechanically decoupled measurement.

Material	Flange: stainless steel 1.4307 / AISI 304L
	Flange cover: AlSiMgBi
	Rod: stainless steel 1.4571 / AISI 316Ti
	Sealing: O-ring FKM 80, Supporting ring: PTFE
Mounting	Plugged into cylinders, secured in position with set screw M5 ISO 4026
Electrical connection	Cable 3x 0.5 mm² (AWG 20), PUR, unshielded / Connector M12x1, A-coded / Connector system M12x1, A-coded with lead wires
Mechanical Data	
Dimensions	See dimension drawing




Ordering Specifications

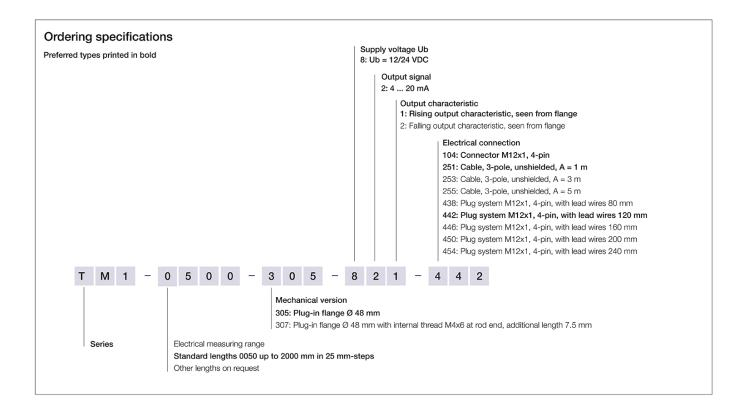



Drawing

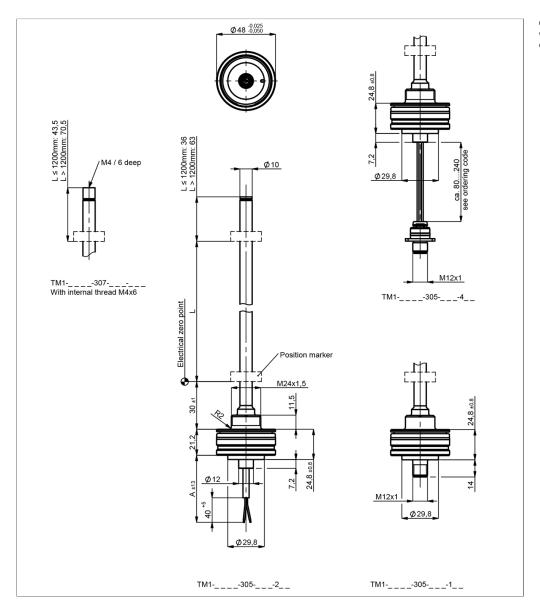

CAD data see www.novotechnik.de/en/download/caddata/



Technical Data

type TM1305-82 butupt signal 4 20 mA butuden @Ub 24 V: \$500 Ω, @Ub 12 V: ≤250 Ω sampling rate / Update rate 0.5 kHz leactrical measuring range (dim. L) 0 50 mm up to 0 2000 mm bisobulte linearity ≤ ±0.04 %FS (min. 300 μm) olerance of electr. zero point ±1 mm despetability ≤ ±0.1 mm depetability ≤ ±0.1 mm emperature error typ. 50 ppm/K (min. 0.01 mm/K) supply voltage Ub 12/24 VDC (8 32 VDC) supply voltage ripple ≤ 10% Ub vover drain w/o load < 1 W voveroltage protection 36 VDC (permanent) volarity protection yes (36 VDC) short circuit protection yes (36 VDC) staulation resistance (500 VDC) ≥ 10 MΩ invironmental Data Acx. operational speed Mechanically unlimited ibroton IEC 60068-2-6 20 g., 10 2000 Hz, Amax = 0.75 mm brotection class DIN EN 80529 IPG7 (connector system M12, fastened, when correctly fitted in cylinder: IP68) brotection class DIN EN 80529 IPG7 (connector system M12, fasten
Qub 24 V: ≤ 500 Ω, @Ub 12 V: ≤ 250 Ω
Sampling rate / Update rate 0.5 kHz Sectrical measuring range (dim. L) 0 50 mm up to 0 2000 mm Absolute linearity ≤ ±0.04 %FS (min. 300 μm) Selevance of electr. zero point ±1 mm Sepeatability ≤ ±0.1 mm Sepeatability (Sepeatability Sepeatability Sepeatability Sepeatability Sepeatability Sepeatability Sepeatability Sepeatability Sepeatability Sepeatability Sepatability Sepatabil
Securical measuring range (dim. L)
Sebolute linearity ≤ ±0.04 %FS (min. 300 μm)
Secolution ±1 mm
Resolution ≤ 0.1 mm Repeatability ≤ ±0.1 mm Repeatability (min. 0.01 mm/K) Repeatability (min.
Seperatability Separatability Sep
yesteresis ≤ ±0.1 mm temperature error typ. 50 ppm/K (min. 0.01 mm/K) supply voltage Ub 12/24 VDC (8 32 VDC) supply voltage ripple ≤ 10% Ub Power drain w/o load <1 W Power drain w/o load <1 W Power of the circuit protection 36 VDC (permanent) Polarity protection yes (-36 VDC) Short circuit protection yes (output vs GND and supply voltage up to 36 VDC) Servironmental Data Max. operational speed Mechanically unlimited Potention IEC 60068-2-6 20 g, 10 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-7 100 g, 11 ms (single hit) Potention class DIN EN 60529 IP67 (Connector system M12, fastened, when correctly fitted in cylinder: IP69)
imperature error typ. 50 ppm/K (min. 0.01 mm/K) Supply voltage Ub 12/24 VDC (8 32 VDC) Supply voltage ripple ≤ 10% Ub Power drain w/o load <1 W Dervoltage protection 36 VDC (permanent) Volarity protection yes (-36 VDC) Short circuit protection yes (output vs GND and supply voltage up to 36 VDC) Short circuit protection yes (output vs GND and supply voltage up to 36 VDC) Servironmental Data Max. operational speed Mechanically unlimited About 10 G0068-2-6 20 g, 10 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-7 100 g, 11 ms (single hit) Protection class DIN EN 60529 IP67 (Connector system M12, fastened, when correctly fitted in cylinder: IP69)
Supply voltage Ub 12/24 VDC (8 32 VDC) Supply voltage ripple ≤ 10% Ub 20wer drain w/o load < 1 W 20wervoltage protection 36 VDC (permanent) 20larity protection yes (-36 VDC) 36 vDC) 36 vDC (permanent) 20larity protection yes (output vs GND and supply voltage up to 36 VDC) 36 vDC 37 voltage up to 36 vDC 38 vDC 39 voltage up to 36 vDC 39 voltage up to 36 vDC 30 vDC 40 vDC
Supply voltage ripple ≤ 10% Ub Sower drain w/o load < 1 W Overvoltage protection 36 VDC (permanent) Polarity protection yes (-36 VDC) Short circuit protection yes (output vs GND and supply voltage up to 36 VDC) sultation resistance (500 VDC) ≥ 10 MΩ Finitronmental Data Max. operational speed Mechanically unlimited (fibration IEC 60068-2-6 20 g, 10 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-7 100 g, 11 ms (single hit) Protection class DIN EN 60529 IP67 (Connector system M12, fastened, when correctly fitted in cylinder: IP69)
Power drain w/o load < 1 W Divervoltage protection 36 VDC (permanent) Polarity protection yes (-36 VDC) Short circuit protection yes (output vs GND and supply voltage up to 36 VDC) sulation resistance (500 VDC) ≥ 10 MΩ Finitronmental Data Max. operational speed Mechanically unlimited Ribration IEC 60068-2-6 20 g, 10 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-7 100 g, 11 ms (single hit) Protection class DIN EN 60529 IP67 (Connector system M12, fastened, when correctly fitted in cylinder: IP69)
Overvoltage protection 36 VDC (permanent) Polarity protection yes (-36 VDC) Short circuit protection yes (output vs GND and supply voltage up to 36 VDC) Insulation resistance (500 VDC) ≥ 10 MΩ Environmental Data Max. operational speed Max operational speed Mechanically unlimited Shock IEC 60068-2-6 20 g, 10 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-27 100 g, 11 ms (single hit) Protection class DIN EN 60529 IP67 (Connector system M12, fastened, when correctly fitted in cylinder: IP69)
Polarity protection yes (-36 VDC) Short circuit protection yes (output vs GND and supply voltage up to 36 VDC) sulation resistance (500 VDC) ≥ 10 MΩ Environmental Data Max. operational speed Mechanically unlimited Fibration IEC 60068-2-6 20 g, 10 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-27 100 g, 11 ms (single hit) Protection class DIN EN 60529 IP67 (Connector system M12, fastened, when correctly fitted in cylinder: IP69)
Short circuit protection yes (output vs GND and supply voltage up to 36 VDC) sulation resistance (500 VDC) ≥ 10 MΩ Environmental Data Max. operational speed Mechanically unlimited (Totation IEC 60068-2-6 20 g, 10 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-27 100 g, 11 ms (single hit) Protection class DIN EN 60529 IP67 (Connector system M12, fastened, when correctly fitted in cylinder: IP69)
Insulation resistance (500 VDC) ≥ 10 MΩ Environmental Data Max. operational speed Mechanically unlimited (fibration IEC 60068-2-6 20 g, 10 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-7 100 g, 11 ms (single hit) Protection class DIN EN 60529 IP67 (Connector system M12, fastened, when correctly fitted in cylinder: IP69)
Amage
Max. operational speed Mechanically unlimited //bration IEC 60068-2-6 20 g, 10 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-27 100 g, 11 ms (single hit) Protection class DIN EN 60529 IP67 (Connector system M12, fastened, when correctly fitted in cylinder: IP69)
//ibration IEC 60068-2-6 20 g, 10 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-27 100 g, 11 ms (single hit) Protection class DIN EN 60529 IP67 (Connector system M12, fastened, when correctly fitted in cylinder: IP69)
Shock IEC 60068-2-27 100 g, 11 ms (single hit) Protection class DIN EN 60529 IP67 (Connector system M12, fastened, when correctly fitted in cylinder: IP69)
Protection class DIN EN 60529 IP67 (Connector system M12, fastened, when correctly fitted in cylinder: IP69)
AO . 10590 (connector M40 / coble) 40
Operating temperature -40 +105°C (connector M12 / cable), -40 +85°C (connector system M12)
Operating humidity 0 95 % R.H. (no condensation)
Vorking pressure ≤ 350 bar
Pressure peaks ≤ 450 bar
Burst pressure > 700 bar
ife Mechanically unlimited
unctional safety If you need assistance in using our products in safety-related systems, please contact us
/TTF (IEC 60050) 355 years
MC Compatibility
SO 10605 ESD (Handling/Component) 8 kV / 15 kV
SO 11452-2 Radiated HF-fields 100 V/m
SO 11452-4 BCI (Bulk current injection) 200 mA
DISPR 25 Radiated emission Level 4
SO 7637-2 Transient Emissions Level 1/2
SO 7637-2 Pulses on supply lines (1, 2a, 2b, 3a, 3b) Level 4
SO 7637-3 Pulses on output lines (3a, 3b) Fast Level 2
SO 16750 Pulses on supply lines Starting profile Level 4 @12 V / Level 3 @24 V, Load dump A +200 V
N 13309 Construction machinery
SO 14982 Agricult./forestry machines
mission/Immunity Exceeds E1 requirements
The EMC measurements are conducted in a reference cylinder. The EMC properties can deviate when using different cylinders.

FS = Full scale: Signal span according to electrical measuring range


Connection Assignment


Connection Assignment						
Signal	Cable	Connector	Plug system			
	code 2	code 1	code 4			
Supply voltage Ub	BN	Pin 1	Pin 1			
GND	WH	Pin 3	Pin 3			
Signal output	GN	Pin 2	Pin 2			
Do not connect	-	Pin 4	Pin 4			





Technical Data Output Characteristics

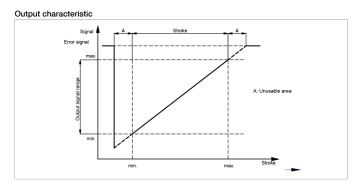






Position Markers



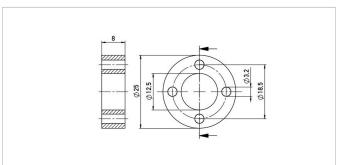

Ring position marker for fixation with screws M3


Material PA6-GF Weight approx. 12 g Operating temp. -40 ... +100°C Surface pressure max. 40 N/mm² Fastening torque max. 100 Ncm

of mounting

P/N Pack. unit [pcs]

400005697



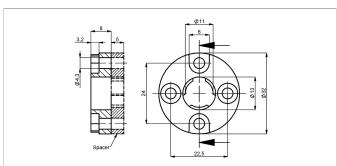

Z-TH1-P19

Z-TH1-PD19 With spacer


Ring position marker for fixation with screws M4,

optionally with or without spacer

PA6-GF, Spacer: POM-GF Material Weight approx. 14 g Operating temp. -40 ... +100°C Surface pressure max. 40 N/mm² Fastening torque max. 100 Ncm

Pack. unit P/N Spacer [pcs] 400005698 400107117 incl.



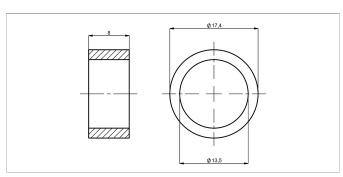

Z-TH1-P30


Ring position marker for mounting via lock

washer and retaining ring

Material NdFeB bonded (EP) Weight approx. 5 g Operating temp. -40 ... +100°C Surface pressure max. 10 N/mm² P/N Pack. unit [pcs]

400106139



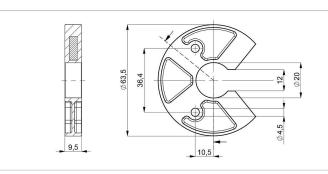

U-shaped position marker for fixation with M4 screws

Caution: for dimension of electrical zero point please follow the user manual!

PA6-GF Operating temp. -40 ... +105°C Surface pressure max. 40 N/mm² Fastening torque max. 100 Ncm


of mounting

Pack. unit [pcs] 400105076



Position Markers





Z-TH1-P32

Ball-type floating position marker Material Stainless steel 1.4571 Weight approx. 42 g Operating temp. -40 ... +100°C Compression ≤ 40 bar


strength

720 kg/m³ Density Immersion depth 36.7 mm

in water

P/N Pack. unit [pcs] 400105703






Z-TH1-P21

Cylinder floating position marker Stainless steel 1.4404 Material Weight approx. 20 g Operating temp. -40 ... +100°C Compression ≤ 8 bar strength 740 kg/m³

Density Immersion depth approx. 26.6 mm

in water

P/N Pack. unit [pcs] 400056044




When using floating position markers, we recommend to secure the marker against loss with a washer at the rod end. For this purpose, a sensor version with inner


thread at the rod end is required (s. ordering code).



Connector System M12







EEM-33-35/36/37

M12x1 Mating female connector, 4-pin, straight, A-coded, with molded cable, not shielded, IP67,

open ended

Plug housing PA


Cable sheath PUR, Ø = max. 6 mm,


-40 ... +85°C (fixed)

Lead wires PP, 0.34 mm²

P/N	Type	Length
400056135	EEM-33-35	2 m
400056136	EEM-33-36	5 m
400056137	EEM-33-37	10 m







EEM-33-38/39/40

M12x1 Mating female connector, 4-pin, angled, A-coded, with molded cable, not shielded, IP67, open ended


Plug housing PA


Cable sheath PUR, $\emptyset = \text{max. 6 mm}$,

-40 ... +85°C (fixed) PP, 0.34 mm²

P/N	Туре	Length	
400056138	EEM-33-38	2 m	
400056139	EEM-33-39	5 m	
400056140	EEM-33-40	10 m	







EEM-33-89

Lead wires

M12x1 Mating female connector, 4-pin, angled, A-coded, with coupling nut, screw termination, IP67, not shieldable Operating temp. -25 ... +90°C

Plug housing PBT

PBI

For wire gauge 6 ... 8 mm, max. 0.75 mm²

P/N Type 400005634 EEM-33-89

IP67 Protection class IP67 DIN EN 60529





Very good Electromagnetic Compatibiliy (EMC) and shield systems



Very good resistance to oils, coolants and lubricants



Suited for applications in dragchains



UL - approved





Novotechnik Messwertaufnehmer OHG P.O.Box 4220 73745 Ostfildern (Germany) Horbstrasse 12 73760 Ostfildern (Germany) Phone +49 711 4489-0 Fax +49 711 4489-118 info@novotechnik.de www.novotechnik.de



© Jul 18, 2022