

NOVOSTRICTIVE Transducer Touchless


TM1 Screw flange 4 ... 20 mA

Mobile Applications







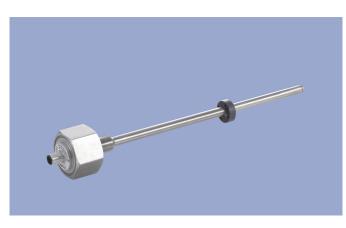

Special Features

- For integration in pneumatic and hydraulic cylinders
- Touchless magnetostrictive measurement technology
- Operating pressure up to 350 bar, peaks up to 450 bar
- Ring-shaped position marker does not contact sensor
- Unlimited mechanical life
- No velocity limit for position marker
- Absolute output
- Outstanding accuracy performance up to 0.04 %
- Wide range of supply voltage
- Optimized for use in mobile applications with highest EMC requirements such as ISO pulses and high interferences to ISO 11452, exceeds E1 requirements
- Other configurations see separate data sheets

Applications

Hydraulic or pneumatic cylinders in

- Agricultural and forestry machinery
- Construction machines
- Vehicles with loading and unloading devices
- Vehicles with extension arms

The absolute position transducer can be used directly in-cylinder and thus enables a compact and cost-effective position measurement. The sensor consists of a stainless steel flange welded to a pressure tight rod and can therefore be used in harsh environments.


The magnetostrictive measuring technology offers excellent accuracy for measuring lengths up to 2000 mm.

The passive ring-shaped position marker allows a mechanically decoupled measurement.

Description Material	Flange: stainless steel 1.4307 / AISI 304L	
	Flange cover: AlSiMgBi	
	Rod: stainless steel 1.4571 / AISI 316Ti	
	Sealing: O-ring NBR 90 SH A	
Mounting	Screwed into cylinder via bushing M18x1.5 for screw plug hole per ISO 6149	
Electrical connection	Cable 3x 0.5 mm² (AWG 20), PUR, unshielded / Connector M12x1, A-coded	
Mechanical Data		
Dimensions	See dimension drawing	




Ordering Specifications

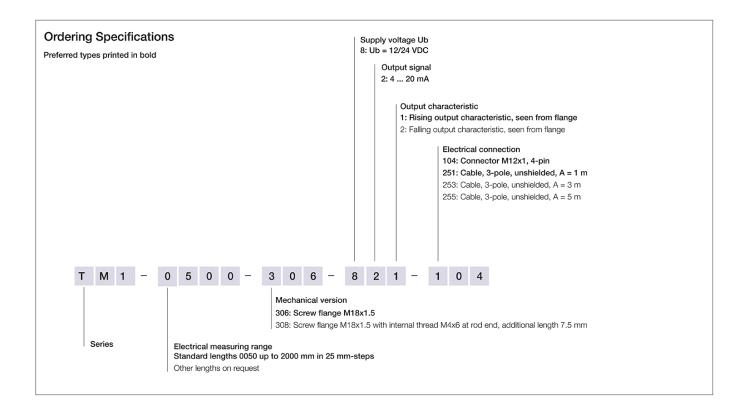



Drawing

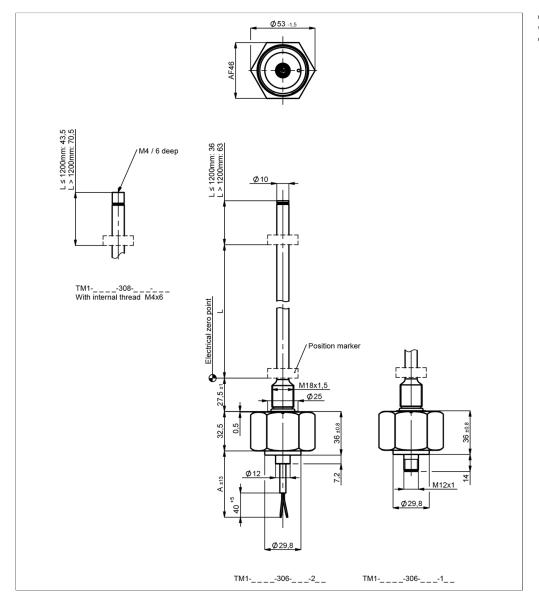

CAD data see www.novotechnik.de/en/download/caddata/



Technical Data

Туре	TM1306-82
Output signal	4 20 mA
Burden	@Ub 24 V: ≤ 500 Ω, @Ub 12 V: ≤ 250 Ω
Sampling rate / Update rate	0.5 kHz
Electrical measuring range (dim. L)	0 50 mm up to 0 2000 mm
Absolute linearity	≤ ±0.04 %FS (min. 300 µm)
Tolerance of electr. zero point	±1 mm
Resolution	≤ 0.1 mm
Repeatability	≤±0.1 mm
Hysteresis	≤ ±0.1 mm
Temperature error	typ. 50 ppm/K (min. 0.01 mm/K)
Supply voltage Ub	12/24 VDC (8 32 VDC)
Supply voltage ripple	≤ 10% Ub
Power drain w/o load	<1 W
Overvoltage protection	36 VDC (permanent)
Polarity protection	yes (-36 VDC)
Short circuit protection	yes (output vs GND and supply voltage up to 36 VDC)
Insulation resistance (500 VDC)	≥ 10 MΩ
Environmental Data	
Max. operational speed	Mechanically unlimited
Vibration IEC 60068-2-6	20 g, 10 2000 Hz, Amax = 0.75 mm
Shock IEC 60068-2-27	100 g, 11 ms (single hit)
Protection class DIN EN 60529	IP67
Operating temperature	-40 +105°C
Operating humidity	0 95 % R.H. (no condensation)
Working pressure	≤ 350 bar
Pressure peaks	≤ 450 bar
Burst pressure	> 700 bar
Life	Mechanically unlimited
Functional safety	If you need assistance in using our products in safety-related systems, please contact us
MTTF (IEC 60050)	355 years
EMC Compatibility	
ISO 10605 ESD (Handling/Component)	8 kV / 15 kV
ISO 11452-2 Radiated HF-fields	100 V/m
ISO 11452-4 BCI (Bulk current injection)	200 mA
CISPR 25 Radiated emission	Level 4
ISO 7637-2 Transient Emissions	Level 1/2
ISO 7637-2 Pulses on supply lines	(1, 2a, 2b, 3a, 3b) Level 4
ISO 7637-3 Pulses on output lines	(3a, 3b) Fast Level 2
ISO 16750 Pulses on supply lines	Starting profile Level 4 @12 V / Level 3 @24 V, Load dump A +200 V
EN 13309 Construction machinery	
ISO 14982 Agricult./forestry machines	
Emission/Immunity	Exceeds E1 requirements
-	The EMC measurements are conducted in a reference cylinder. The EMC properties can deviate when using different cylinders.

FS = Full scale: Signal span according to electrical measuring range


Connection Assignment


Connection Assignment				
Signal	Cable	Connector		
	code 2	code 1		
Supply voltage Ub	BN	Pin 1		
GND	WH	Pin 3		
Signal output	GN	Pin 2		
Do not connect	-	Pin 4		





Technical Data Output Characteristics

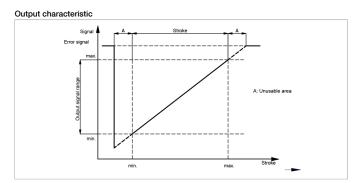


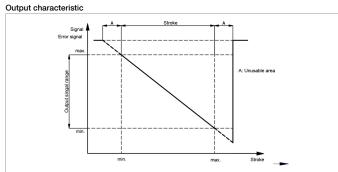



Position Markers



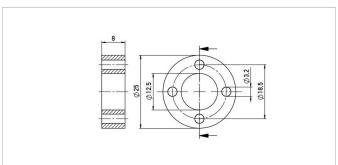

Ring position marker for fixation with screws M3


Material PA6-GF Weight approx. 12 g Operating temp. -40 ... +100°C Surface pressure max. 40 N/mm² Fastening torque max. 100 Ncm

of mounting

P/N Pack. unit [pcs]

400005697



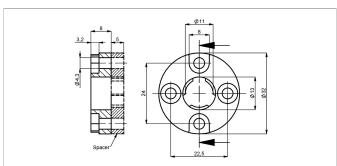

Z-TH1-P19

Z-TH1-PD19 With spacer


Ring position marker for fixation with screws M4,

optionally with or without spacer

PA6-GF, Spacer: POM-GF Material Weight approx. 14 g Operating temp. -40 ... +100°C Surface pressure max. 40 N/mm² Fastening torque max. 100 Ncm

Pack. unit P/N Spacer [pcs] 400005698 400107117 incl.



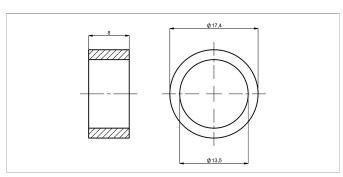

Z-TH1-P30


Ring position marker for mounting via lock

washer and retaining ring

Material NdFeB bonded (EP) Weight approx. 5 g Operating temp. -40 ... +100°C Surface pressure max. 10 N/mm² P/N Pack. unit [pcs]

400106139



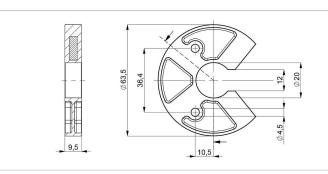

U-shaped position marker for fixation with M4 screws

Caution: for dimension of electrical zero point please follow the user manual!

PA6-GF Operating temp. -40 ... +105°C Surface pressure max. 40 N/mm² Fastening torque max. 100 Ncm


of mounting

Pack. unit [pcs] 400105076



Position Markers



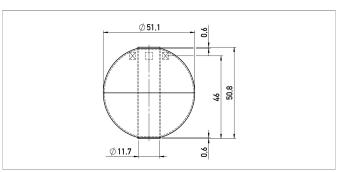

Z-TH1-P32

Ball-type floating position marker

Material Stainless steel 1.4571

Weight approx. 42 g

Operating temp. -40 ... +100°C

Compression ≤ 40 bar

strength


Density 720 kg/m³ Immersion depth 36.7 mm

in water

 P/N
 Pack. unit [pcs]

 400105703
 1



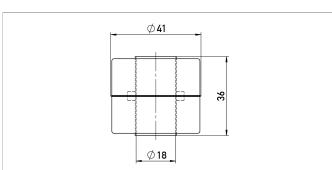

Z-TH1-P21

Oylinder floating position marker

Material Stainless steel 1.4404

Weight approx. 20 g

Operating temp. -40 ... +100°C

Compression ≤ 8 bar


strength

Density 740 kg/m³ Immersion depth approx. 26.6 mm

in water

P/N Pack. unit [pcs]


400056044

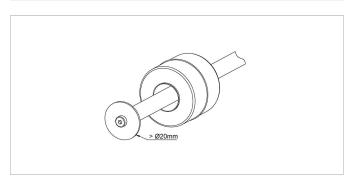

When using floating position markers, we recommend to secure the marker against loss with a washer at the rod end.

For this purpose, a sensor version with inner thread at the rod end is required (s. ordering code).



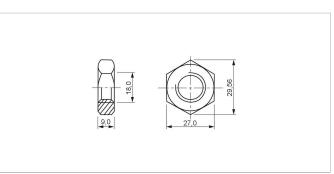

Z-TH1-M01


Lock nut ISO 8675, M18x1.5-A2


P/N	Pack. unit [pcs]
400056090	1



Connector System M12







EEM-33-35/36/37

M12x1 Mating female connector, 4-pin, straight, A-coded, with molded cable, not shielded, IP67,

open ended

Plug housing PA


Cable sheath PUR, Ø = max. 6 mm,


-40 ... +85°C (fixed)

Lead wires PP, 0.34 mm²

P/N	Type	Length
400056135	EEM-33-35	2 m
400056136	EEM-33-36	5 m
400056137	EEM-33-37	10 m







EEM-33-38/39/40

M12x1 Mating female connector, 4-pin, angled, A-coded, with molded cable, not shielded, IP67, open ended


Plug housing PA


Cable sheath PUR, $\emptyset = \text{max. 6 mm}$,

-40 ... +85°C (fixed) PP, 0.34 mm²

P/N	Туре	Length	
400056138	EEM-33-38	2 m	
400056139	EEM-33-39	5 m	
400056140	EEM-33-40	10 m	







EEM-33-89

Lead wires

M12x1 Mating female connector, 4-pin, angled, A-coded, with coupling nut, screw termination, IP67, not shieldable Operating temp. -25 ... +90°C

Plug housing PBT

PBI

For wire gauge 6 ... 8 mm, max. 0.75 mm²

P/N Type 400005634 EEM-33-89

IP67 Protection class IP67 DIN EN 60529





Very good Electromagnetic Compatibiliy (EMC) and shield systems



Very good resistance to oils, coolants and lubricants



Suited for applications in dragchains



UL - approved





Novotechnik Messwertaufnehmer OHG P.O.Box 4220 73745 Ostfildern (Germany) Horbstrasse 12 73760 Ostfildern (Germany) Phone +49 711 4489-0 Fax +49 711 4489-118 info@novotechnik.de www.novotechnik.de



© Jul 20, 2022