NOVOHALL Rotary Sensor Touchless

RFC-4800 Ratiometric



Special Features

- Touchless hall technology
- Electrical range up to 360°
- 2 part design, mechanically decoupled
- High protection class IP67, IP68, IP69
- Resolution 12 bit
- Wear-free
- Temperature range -40 °C to +105 °C
- Optimized for use in industrial applications
- Other configurations see separate data sheets



Applications

- Manufacturing Engineering (textile machinery, packaging machinery, sheet metal and wire machinery)
- Automation technology
- Medical Engineering


The 2 part design consisting of sensor and magnetic position marker offers great flexibility when mounting. The absence of shaft and bearing makes the assembly much less sensitive to axial and radial application tolerances - separate couplings are obsolete. Measurements can be made transmissively through any non-ferromagnetic material.

The sensor is perfectly suitable for use in harsh environmental conditions through the completely encapsulated electronics.

Description	
Description Material	Housing: high grade, temperature resistant plastic
Mounting	With 2 pan head screws M4x20 (included in delivery)
Fastening torque of mounting	250 Ncm
Electrical connection	Cable 4x 0.5 mm ² (AWG 20), TPE, shielded / Connector M12x1, A-coded with cable L = 0.15 m
Mechanical Data	
Dimensions	See dimension drawing
Mechanical travel	continuous
Weight (w/o connection)	approx. 50 g



Ordering Specifications

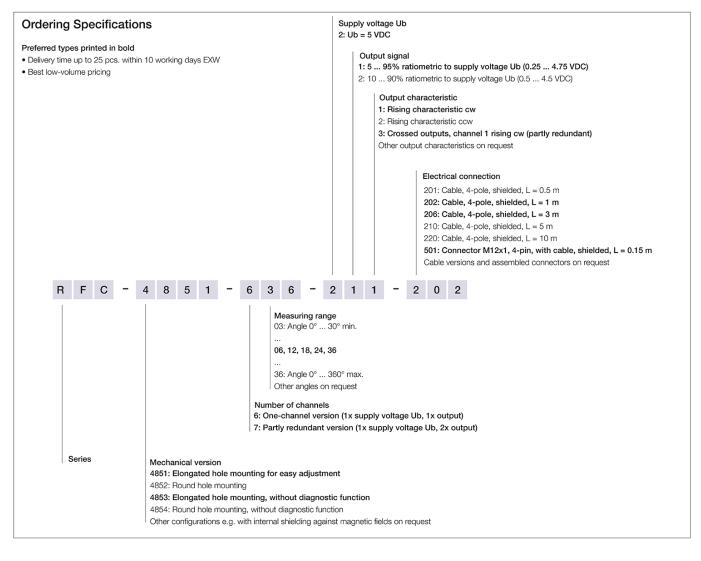


Accessories included in delivery


• 2x Pan head screws M4x20



Drawing

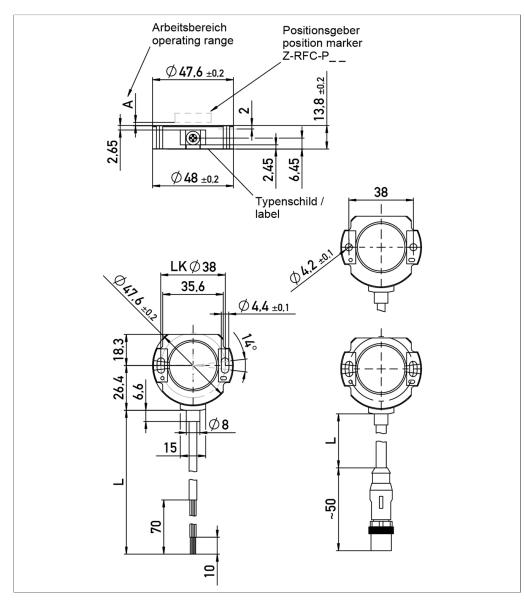

CAD data see www.novotechnik.de/en/download/caddata/



When the marking of the position marker is pointing towards the cable, the sensor output is near the electrical center position (index position).



Technical Data

Retornetric Output signal Informetric to supply voltage Ub 595% (0.25 4.75 V) 1000% (0.5 4.5 V) Load \$ 5 K0 Number of channels 1 / 2 Diagnosis activated (in case of error, output signal is outside of the plausible signal range) Ubdate rate 0p. 3.4 H42 Measuring range 030° in 10°-steps Measuring range 30°. in 0°-steps 100 Nopp- ext 11 2 bits Repositubility Vp. s 4.01° Mystersis 050 VDC Supply voltage Ub 5 VDC (4.555 VDC) Current consumption wol load Vp. 1.2 mA per channel Point protection yee (supply intera and outputs) Stort circuit protection yee (supply intera and outputs) Stort circuit protection yee (supply intera do dottputs) Stort circuit protection yee (supply intera do dottputs) Mort circuit consumption wol load 0.9. 1.2 mA per channel <th>Туре</th> <th>RFC-482</th>	Туре	RFC-482
595% (0.254.75 V) Load > 5 K2 Number of channels 1.72 Diagnosis activated (in case of enro, output signal is outside of the plausible signal range) Update rate Vp. 3.4 kHz Measuring range 030° up to 030° up to 10°-steps Independent linearity < 4.0.5 Krs Resolution 12 bits Resolution 12 bits Repeatability Vp. 5 4.0.1° Hysteresis Vp. 5 4.0.1° Temperature enror Measuring range 30170°: typ. 4.0.7% Krs, Measuring range ≥ 160°: typ. ±0.35 % Krs Supply voltage Ub 5 VDC (4.55 S VDC) Correct consumption w/o load Vp. 1.2		Ratiometric
1090% (0.54.5 y) Load ≥ 5 k2 Number of channels 1/2 Diagnosia activated (in case of error, output signal is outside of the plausible signal range) Update rate Update rate bp. 3.4 Met Measuring range 030° up to 0380° in 10°-steps Independent linearity ≤ ±0.5 % RFS Repatability yp. s ±0.1° Repatability yp. s ±0.1° N/// measuring range 360°: typ. < 0.25° (lower hysteresis on request)	Output signal	ratiometric to supply voltage Ub
Load 2 5 k0 Number of channels 1 / 2 Diagnosis activated (in case of error, output signal is outside of the plausible signal range) Update rate typ. 3.4 kHz Measuring range 0 30° tip to 0 30° tin 10°-steps independent linearity ≤ ±0.5 %FS Resolution 12 bits Repeatability typ. s ±0.1° Hysteresis typ. < ±0.1°		5 95% (0.25 4.75 V)
Number of channels 1 / 2 Digmosis activated (in case of error, output signal is outside of the plausible signal range) Update rate Vp. 3.4 kHz Measuring range 0 30° up to 0 360° in 10°-steps Independent linearity ≤ 4.0.5 %FS Resolution 12 bits Repeatability Vp. 5 < 0.1°		10 90% (0.5 4.5 V)
Dagnosis activated (in case of error, output signal is outside of the plausible signal range) Update rate typ. 3.4 kHz Measuring range 0 30° up to 0 30° in 10°-steps independent linearity ≤ ±0.5 %FS Resolution 12 bits Repeatability typ. ≤ 0.1° Mysteresis typ. < ±0.1°	Load	≥ 5 ΚΩ
Update rate tp. 3.4 kHz Measuring range 030° up to 0 960° in 10°-steps Independent linearity ≤ 4.0.5 %FS Reputability tp. < ± 0.1°	Number of channels	1/2
Measuring range 0 30° up to 0 30° in 10°-steps Independent linearity ≤ 10.5 %FS Resolution 12 bits Repetability typ. $\leq \pm 0.1^\circ$ Hysteresis typ. $< \pm 0.1^\circ$ Construction Measuring range 380°: typ. $< 0.25°$ (lower hysteresis on request) Temperature error Measuring range 380°: typ. $< 0.25°$ (lower hysteresis on request) Current consumption w/o load typ. 12 mA per channel Polarity protection yes (supply voltage Ub) Short circuit protection yes (supply voltage Ub) Short circuit protection yes (supply voltage Ub) Rax, operational speed Mechanically unlimited Vibration IEC 60068-2-6 20 g. 5 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-7 50 g. 6 ms Protection Classe PIPC7 (connector M12) Operating temperature -40 + 105°C, -25 + 86°C (connector M12) Life Mechanically unlimited Functional slefy If you need assistance in using our products in safety-related systems, please contact us MTTF (IEC 60050) 1652 years (one-channel) or 824 years (partly redundant, per channel) Traceability Serial number on type labeling; production batch of the sensor	Diagnosis	activated (in case of error, output signal is outside of the plausible signal range)
Independent linearity ≤ ±0.5 %FS Resolution 12 bits Resolution 12 bits Repeatability typ. ≤ ±0.1° (My measuring range 360°: typ. < 0.25° (lower hysteresis on request) Temperature error Measuring range 30.0°. T(70°: typ. ±0.7 %FS, Measuring range ≥ 180°: typ. ±0.35 %FS Supply voltage Ub 5 VDC (4.5 5.5 VDC) Current consumption w/o load typ. 12 mA per channel Polarity protection yes (s. GND and supply voltage Ub) Short circuit protection yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Short circuit protection yes (s. GND and supply voltage Ub) Short circuit protection yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Short circuit protection yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Short circuit protection yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and supply voltage Ub) Reversion 10 yes (s. GND and su	Update rate	typ. 3.4 kHz
Resolution 12 bits Repeatability typ. s ± 0.1° Hysteresis typ. s ± 0.1° Only measuring range 360°: typ. < 0.25° (lower hysteresis on request)	Measuring range	0 30° up to 0 360° in 10°-steps
Repeatabilitytyp. $\leq \pm 0.1^{\circ}$ Hysteresistyp. $< \pm 0.1^{\circ}$ Only measuring range 380°: typ. $< 0.25^{\circ}$ (lower hysteresis on request)Temperature errorMeasuring range 30170°: typ. ± 0.7 %FS, Measuring range $\geq 180^{\circ}$: typ. ± 0.35 %FSSupply voltage Ub $5 \text{ VDC} (4.55.5 \text{ VDC})$ Current consumption w/o loadtyp. 12 mA per channelPolarity protectionyes (us. GND and supply voltage Ub)Insulation resistance (500 VDC) $\geq 10 \text{ MQ}$ Environmental Datamechanically unlimitedMax. operational speedMechanically unlimitedVibration IEC 60088-2-620 g, 5 2000 Hz, drame $= 0.75 \text{ mm}$ Shock IEC 60088-2-750 g, 6 msProtection class DIN EN 60529IP67 / IP68 / IP69, IP67 (connector M12)Querating temperature-40 + 105°C, -25 + 485°C (connector M12)UffeMechanically unlimitedFunctional safetyIf you need assistance in using our products in safety-related systems, please contact usMTTF [ICE 60050]1652 years (one-channel) or 524 years (party redundant, per channel)TraceabilitySerial number on type labeling: production batch of the sensor assens/by and relevant sensor componentsConformity/ApprovalCE, UKCA see https://www.novotechnik.de/en/downloads/certificates/eclarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eclarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eclarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eclarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloa	Independent linearity	≤ ±0.5 %FS
Hysteresis Typ. < ±0.1° Only measuring range 360°: typ. < 0.25° (lower hysteresis on request)	Resolution	12 bits
Only measuring range 360°: typ. < 0.25° (lower hysteresis on request) Temperature error Measuring range 30 170°: typ. ±0.7 %FS, Measuring range ≥ 180°: typ. ±0.35 %FS Supply voltage Ub 5 VDC (4.5 5.5 VDC) Current consumption w/o load typ. 12 mA per channel Polarity protection yes (supply lines and outputs) Short circuit protection yes (xs. GND and supply voltage Ub) Insulation resistance (500 VDC) ≥ 10 MQ Environmental Date Max. operational speed Mechanically unlimited Vibration IEC 60068-2-67 20 g. 5 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-67 50 g. 6 ms Protection class DIN EN 60529 IP67 / IP68 / IP69, IP67 (connector M12) Operating temperature 40+ 106°. (2-55+ 485° C (connector M12) Life Mechanically unlimited Functional safety If you need assistance in using our products in safety-related systems, please contact us MTTF (IEC 60050) 1652 years (one-channel) or 824 years (partly redundant, per channel) Traceability Serial number on type labeling: production back of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/download	Repeatability	typ. ≤ ±0.1°
Temperature error Measuring range 30 170°; typ. ±0.7 %FS, Measuring range ≥ 180°; typ. ±0.35 %FS Supply voltage Ub 5 VDC (4.5 5.5 VDC) Current consumption w/o load typ. 12 mA per channel Polarity protection yes (supply) lines and outputs) Short circuit protection yes (supply) voltage Ub) Insulation resistance (500 VDC) ≥ 10 MQ Environmental Data Max. operational speed Max. operational speed Mechanically unlimited Vibration IEC 60068-2-6 20 g, 5 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-7 50 g, 6 ms Protection class DIN EN 60529 IP67 / IP68 / IP69, IP67 (connector M12) Operating temperature -40 + 105°C, -25 + 85°C (connector M12) Cife Mechanically unlimited Functional safety If you need assistance in using our products in safety-related systems, please contact us MTFT (IEC 60050) 1522 years (one-channel) or 824 years (partly redundant, per channel) Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declaratione-d-conformity-eu/uk WEEE se	Hysteresis	typ. < ±0.1°
Supply voltage Ub 5 VDC (4.5 5.5 VDC) Current consumption w/o load typ. 12 mA per channel Polarity protection yes (supply lines and outputs) Short circuit protection yes (vs. GND and supply voltage Ub) Insulation resistance (500 VDC) ≥ 10 MQ Environmental Data Mechanically unlimited Vibration IEC 60068-2-6 20 g, 5 2000 Hz, Arnax = 0.75 mm Shock IEC 60068-2-7 50 g, 6 ms Protection class DIN EN 60529 IP67 / IP68 / IP69, IP67 (connector M12) Operating temperature -40 + 105°C, -25 + 85°C (connector M12) Ufe Mechanically unlimited Functional safety If you need sasistance in using our products in safety-related systems, please contact us MTTF (IEC 60050) 1652 years (one-channel) or 824 years (partly redundant, per channel) Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/u-ulirective-weee/ EMC Compatibility EN 61000-4-3 ESD (contact/air discharge) 4 kV, 8 kV EN 61000-4-4 Fast transients (burst) 1		Only measuring range 360°: typ. < 0.25° (lower hysteresis on request)
Current consumption w/o load typ. 12 mA per channel Polarity protection yes (supply lines and outputs) Short circuit protection yes (supply voltage Ub) Insulation resistance (500 VDC) ≥ 10 MQ Environmental Data	Temperature error	Measuring range 30 170°: typ. ±0.7 %FS, Measuring range ≥ 180°: typ. ±0.35 %FS
Polarity protection yes (supply lines and outputs) Short circuit protection yes (vs. GND and supply voltage Ub) Insulation resistance (500 VDC) ≥ 10 MΩ Environmental Data Max. operational speed Max. operational speed Mechanically unlimited Vibration IEC 60068-2-6 20 g, 5 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-7 50 g, 6 ms Protection class DIN EN 60529 IP67 / IP68 / IP69, IP67 (connector M12) Operating temperature -40 +105°C, -25 +85°C (connector M12) Life Mechanically unlimited Functional safety If you need assistance in using our products in safety-related systems, please contact us MTTF (IEC 60050) 1652 years (one-channel) or 824 years (party redundant, per channel) Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ EMC Compatibility EN 61000-4-2 ESD (contact/ari discharge) EN 61000-4-2 Electromagnetic fields (RFI) 10 V/m EN 61000-4-4 East transients (burst) 1 KV <t< td=""><td>Supply voltage Ub</td><td>5 VDC (4.5 5.5 VDC)</td></t<>	Supply voltage Ub	5 VDC (4.5 5.5 VDC)
Short circuit protection yes (vs. GND and supply voltage Ub) Insulation resistance (500 VDC) ≥ 10 MΩ Environmental Data Max. operational speed Max. operational speed Mechanically unlimited Vibration IEC 60068-2-6 20 g, 5 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-27 50 g, 6 ms Protection class DIN EN 60529 IP67 / IP68 / IP69, IP67 (connector M12) Operating temperature -40 + 105°C, -25 + 85°C (connector M12) Life Mechanically unlimited Functional safety If you need assistance in using our products in safety-related systems, please contact us MITTF (IEC 60050) 1652 years (one-channel) or 824 years (partly redundant, per channel) Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ EMC Compatibility Serial number on type labeling: production batch of the sensor assembly and relevant sensor conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ EN 61000-4-3 Electromagnetic fields (RFI) 10 V/m EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-5 Cond. disturbanc	Current consumption w/o load	typ. 12 mA per channel
Insulation resistance (500 VDC) ≥ 10 MΩ Environmental Data Mechanically unlimited Max. operational speed Mechanically unlimited Vibration IEC 60068-2-6 20 g, 5 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-7 50 g, 6 ms Protection class DIN EN 60529 IP67 / IP68 / IP69, IP67 (connector M12) Operating temperature -40 +105°C, -25 +85°C (connector M12) Uife Mechanically unlimited Functional safety If you need assistance in using our products in safety-related systems, please contact us MITT (IEC 60050) 1652 years (one-channel) or 824 years (party redundant, per channel) Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ EMC Compatibility EN 61000-4-2 ESD (contact/air discharge) 4 kV, 8 kV EN 61000-4-3 Electromagnetic fields (RFI) 10 V/m EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.	Polarity protection	yes (supply lines and outputs)
Environmental Data Max. operational speed Mechanically unlimited Vibration IEC 60068-2-6 20 g, 5 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-27 50 g, 6 ms Protection class DIN EN 60529 IP67 / IP68 / IP69, IP67 (connector M12) Operating temperature -40 + 105°C, -25 + 85°C (connector M12) Life Mechanically unlimited Functional safety If you need assistance in using our products in safety-related systems, please contact us MTTF (IEC 60050) 1652 years (one-channel) or 824 years (partly redundant, per channel) Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ EN 61000-4-2 ESD (contact/air discharge) EN 61000-4-2 ESD (contact/air discharge) 4 kV, 8 kV EN 61000-4-4 Fast transients (burst) EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) EN 61000-4-6 Cond. disturbances (HF fields) 10 V fm EN 61000-4-6 Cond. disturbances (HF fields)	Short circuit protection	yes (vs. GND and supply voltage Ub)
Max. operational speed Mechanically unlimited Vibration IEC 60068-2-6 20 g, 5 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-27 50 g, 6 ms Protection class DIN EN 60529 IP67 / IP68 / IP69, IP67 (connector M12) Operating temperature -40 +105°C, -25 +85°C (connector M12) Life Mechanically unlimited Functional safety If you need assistance in using our products in safety-related systems, please contact us MTTF (IEC 60050) 1652 years (one-channel) or 824 years (partly redundant, per channel) Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ ENC Compatibility EN 61000-4-2 ESD (contact/air discharge) EN 61000-4-3 Electromagnetic fields (RFI) 10 V/m EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.	Insulation resistance (500 VDC)	≥ 10 MΩ
Vibration IEC 60068-2-6 20 g, 5 2000 Hz, Amax = 0.75 mm Shock IEC 60068-2-27 50 g, 6 ms Protection class DIN EN 60529 IP67 / IP68 / IP69, IP67 (connector M12) Operating temperature -40 + 105°C, -25 + 85°C (connector M12) Life Mechanically unlimited Functional safety If you need assistance in using our products in safety-related systems, please contact us MTTF (IEC 60050) 1652 years (one-channel) or 824 years (partly redundant, per channel) Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ EMC Compatibility 10 V/m EN 61000-4-2 ESD (contact/air discharge) 4 kV, 8 kV EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-4 Cond. disturbances (HF fields) 10 V/m EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.	Environmental Data	
Shock IEC 60068-2-27 50 g, 6 ms Protection class DIN EN 60529 IP67 / IP68 / IP69, IP67 (connector M12) Operating temperature -40 + 105°C, -25 + 85°C (connector M12) Life Mechanically unlimited Functional safety If you need assistance in using our products in safety-related systems, please contact us MTTF (IEC 60050) 1652 years (one-channel) or 824 years (partly redundant, per channel) Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ EMC Compatibility 4 kV, 8 kV EN 61000-4-2 ESD (contact/air discharge) 4 kV, 8 kV EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) 10 V/m	Max. operational speed	Mechanically unlimited
Protection class DIN EN 60529 IP67 / IP68 / IP69, IP67 (connector M12) Operating temperature -40 +105°C, -25 +85°C (connector M12) Life Mechanically unlimited Functional safety If you need assistance in using our products in safety-related systems, please contact us MTTF (IEC 60050) 1652 years (one-channel) or 824 years (partly redundant, per channel) Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE See https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ EMC Compatibility EN 61000-4-2 ESD (contact/air discharge) 4 kV, 8 kV EN 61000-4-3 Electromagnetic fields (RFI) 10 V/m EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.	Vibration IEC 60068-2-6	20 g, 5 2000 Hz, Amax = 0.75 mm
Operating temperature -40 +105°C, -25 +85°C (connector M12) Life Mechanically unlimited Functional safety If you need assistance in using our products in safety-related systems, please contact us MTTF (IEC 60050) 1652 years (one-channel) or 824 years (partly redundant, per channel) Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ EMC Compatibility 4 kV, 8 kV EN 61000-4-2 ESD (contact/air discharge) 4 kV, 8 kV EN 61000-4-3 Electromagnetic fields (RFI) 10 V/m EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.	Shock IEC 60068-2-27	50 g, 6 ms
Life Mechanically unlimited Functional safety If you need assistance in using our products in safety-related systems, please contact us MITTF (IEC 60050) 1652 years (one-channel) or 824 years (partly redundant, per channel) Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ ENC Compatibility EN 61000-4-2 ESD (contact/air discharge) EN 61000-4-3 Electromagnetic fields (RFI) 10 V/m EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.	Protection class DIN EN 60529	IP67 / IP68 / IP69, IP67 (connector M12)
Functional safety If you need assistance in using our products in safety-related systems, please contact us MTTF (IEC 60050) 1652 years (one-channel) or 824 years (partly redundant, per channel) Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ ENC Compatibility EN 61000-4-2 ESD (contact/air discharge) 4 kV, 8 kV EN 61000-4-3 Electromagnetic fields (RFI) 10 V/m EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.	Operating temperature	-40 +105°C, -25 +85°C (connector M12)
MTTF (IEC 60050) 1652 years (one-channel) or 824 years (partly redundant, per channel) Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ EMC Compatibility EN 61000-4-2 ESD (contact/air discharge) 4 kV, 8 kV EN 61000-4-3 Electromagnetic fields (RFI) 10 V/m EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.	Life	Mechanically unlimited
Traceability Serial number on type labeling: production batch of the sensor assembly and relevant sensor components Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ EMC Compatibility EN 61000-4-2 ESD (contact/air discharge) 4 kV, 8 kV EN 61000-4-3 Electromagnetic fields (RFI) 10 V/m EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.	Functional safety	If you need assistance in using our products in safety-related systems, please contact us
Conformity/Approval CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk EMC Compatibility WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ EMC Compatibility EN 61000-4-2 ESD (contact/air discharge) 4 kV, 8 kV EN 61000-4-3 Electromagnetic fields (RFI) 10 V/m Interface EN 61000-4-4 Fast transients (burst) 1 kV Interface EN 61000-4-6 Cond. disturbances (HF fields) 10 Veff. Interface	MTTF (IEC 60050)	1652 years (one-channel) or 824 years (partly redundant, per channel)
WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/ EMC Compatibility EN 61000-4-2 ESD (contact/air discharge) 4 kV, 8 kV EN 61000-4-3 Electromagnetic fields (RFI) 10 V/m EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.	Traceability	Serial number on type labeling: production batch of the sensor assembly and relevant sensor components
EMC Compatibility EN 61000-4-2 ESD (contact/air discharge) 4 kV, 8 kV EN 61000-4-3 Electromagnetic fields (RFI) 10 V/m EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.	Conformity/Approval	CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk
EN 61000-4-2 ESD (contact/air discharge) 4 kV, 8 kV EN 61000-4-3 Electromagnetic fields (RFI) 10 V/m EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.		WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/
EN 61000-4-3 Electromagnetic fields (RFI) 10 V/m EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.	EMC Compatibility	
EN 61000-4-4 Fast transients (burst) 1 kV EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.	EN 61000-4-2 ESD (contact/air discharge)	4 kV, 8 kV
EN 61000-4-6 Cond. disturbances (HF fields) 10 V eff.	EN 61000-4-3 Electromagnetic fields (RFI)	10 V/m
	EN 61000-4-4 Fast transients (burst)	1 kV
EN 55016-2-3 Radiated disturbances Industrial and residential area	EN 61000-4-6 Cond. disturbances (HF field	s) 10 V eff.
	EN 55016-2-3 Radiated disturbances	Industrial and residential area

FS = Full scale: Signal span according to electrical measuring range

Connection Assignment

o o nino o non nicongrini o nic					
Signal	Cable	Connector	Cable	Connector	
	code 2	code 5	code 2	code 5	
	One-channel	One-channel	Partly redundant	Partly redundant	
Supply voltage Ub	GN	Pin 1	GN	Pin 1	
GND	BN	Pin 3	BN	Pin 3	
Signal output	WH	Pin 2	WH	Pin 2	
Signal output 2	-	-	YE	Pin 4	-
Not assigned	YE	Pin 4	-	-	
	Connect cable shielding t	o GND			






Technical Data Output Characteristics

Output characteristic Output characteristic One-channel rising ccw One-channel, rising cw Signa a = 360° - Measuring range Signal a = 360° - m a/2 a/2 0° Cente 360° Apole Angle - cw CW Output characteristic Output characteristic Crossed output characteristics, ch. 1 rising cw On request: signal 2 = 0.5 x signal 1 Signal easuring range _ a = 360⁴ ing range Measuring range a = 360° - m Signal 1 Output signal range a/2 a/2 Signal 2 nin

Output characteristic

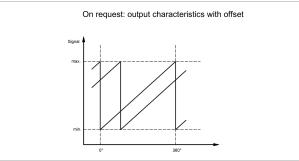


Diagnostic range

Cente


Angle

٥°

Output characteristic

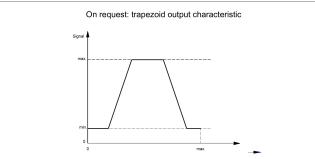


Output characteristic

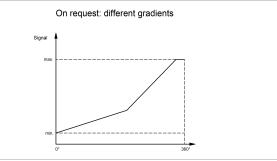


360°


Output characteristic

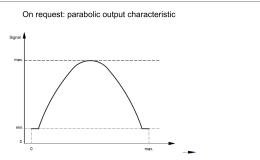




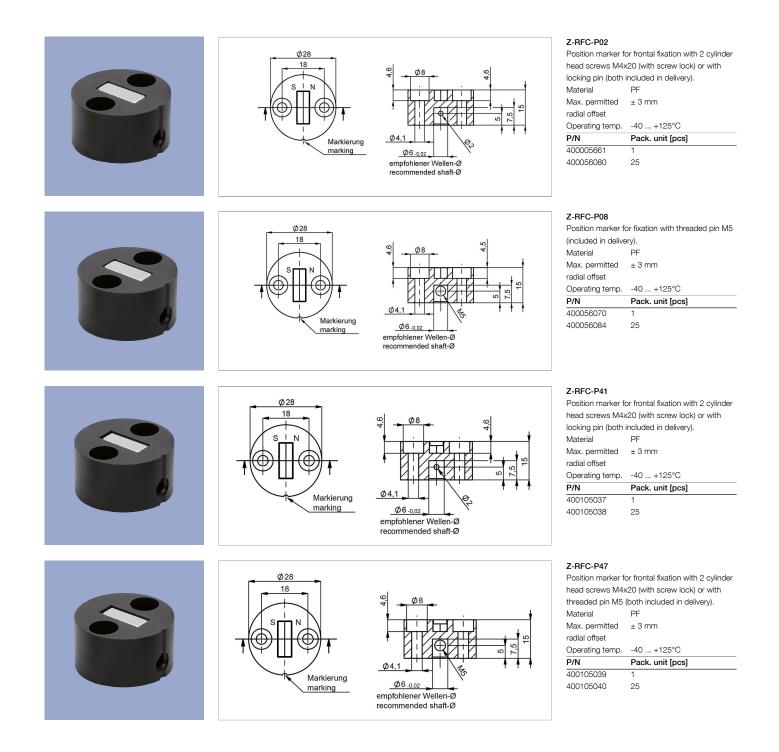




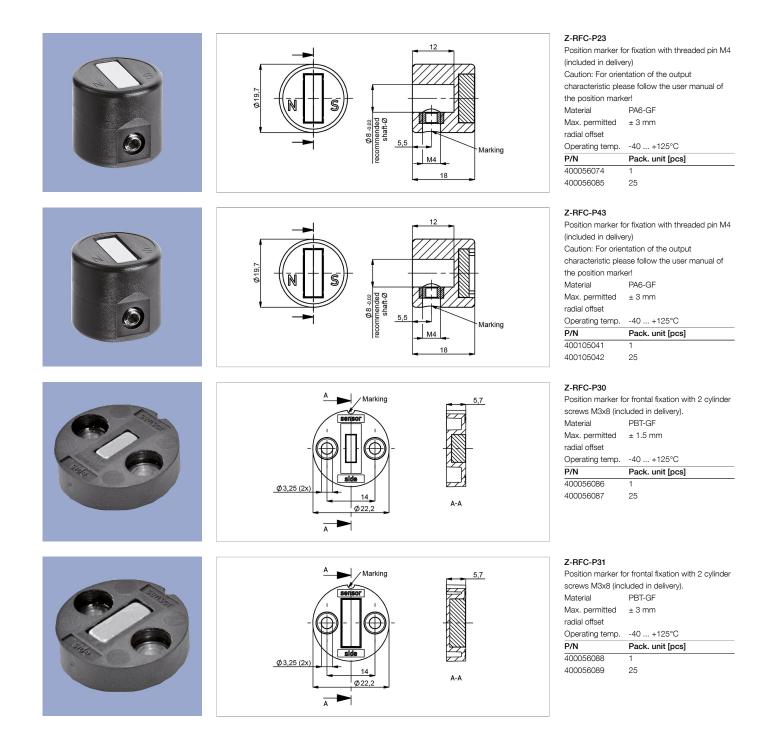



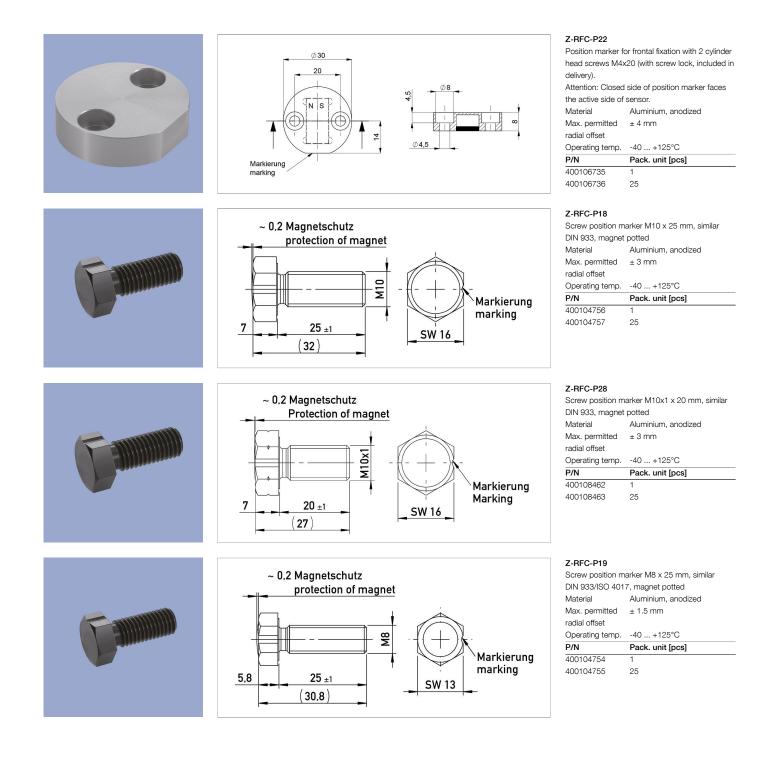



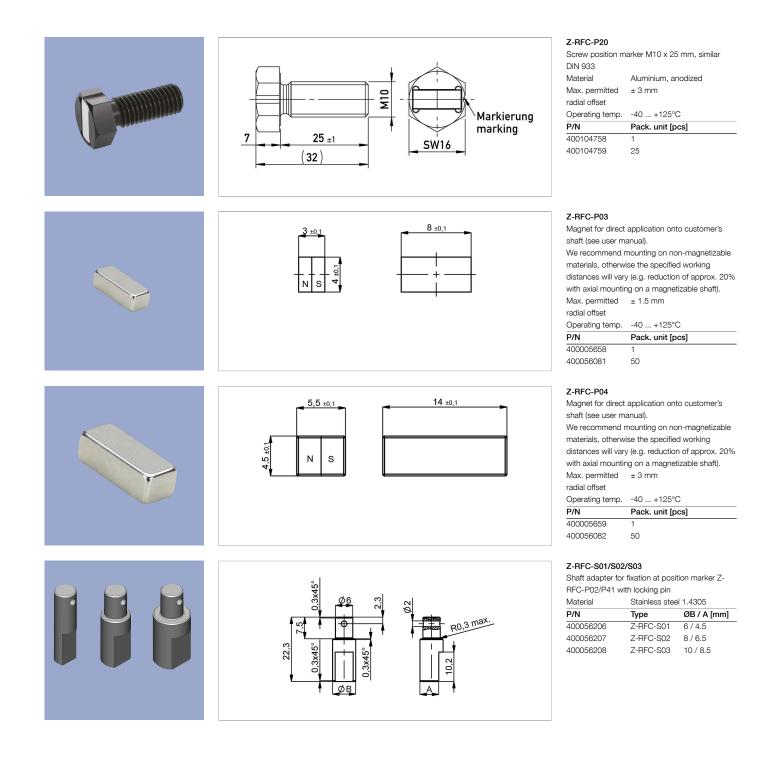




Working Distances Position Markers [mm] - One-channel Versions

	Z-RFC-P02 / P04 / P08 Z-RFC-P20 / P23 / P31	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
RFC-4851	2.3 5	0 2.7	0.7 2.2	0 4.5	0 2.2	4.4 9.2
RFC-4852						
with diagnosis						
RFC-4853	0 4	0 2.7	0 1.5	0 4.5	0 2.2	4.4 9.2
RFC-4854						
w/o diagnosis						

	Z-RFC-P02 / P04 / P08	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
	Z-RFC-P20 / P23 / P31					
RFC-4851	1.9 4.5	0 2.3	0.3 1.8	0 4	0 1.7	4 8.8
RFC-4852						
with diagnosis						
RFC-4853	04	0 2.3	0 1.5	0 4	0 1.7	4 8.8
RFC-4854						
w/o diagnosis						

Lateral Magnet Offset




Lateral magnet offset will cause additional linearity error. The angle error, which is caused by radial displacement of sensor and position marker depends on the used position marker or magnet.

Additional Linearity Error at Radial Displacement - One-channel Versions

Z-RFC-P02 / P04 / P08	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
Z-RFC-P20 / P23 / P31					
0.5 mm: ±0.4°	0.5 mm: ±0.4°	0.5 mm: ±1.4°	0.5 mm: ±0.7°	0.5 mm: ±1.3°	1.0 mm: ±0.8°
1.0 mm: ±1.1°	1.0 mm: ±1.1°	1.0 mm: ±3.7°	1.0 mm: ±1.3°	1.0 mm: ±2.6°	2.0 mm: ±1.8°
2.0 mm: +3.5°	2.0 mm: ±3.5°	2.0 mm: -	2.0 mm: ±3.3°	2.0 mm: -	4.0 mm: ±5.4°
	t Radial Displacement - Redun				
	t Radial Displacement - Redun Z-RFC-P41 / P43 / P47	dant Versions Z-RFC-P03 / P30	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
Z-RFC-P02 / P04 / P08			Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
Z-RFC-P02 / P04 / P08 Z-RFC-P20 / P23 / P31			Z-RFC-P18 / P28 0.5 mm: ±1.1°	Z-RFC-P19 0.5 mm: ±2.3°	Z-RFC-P22 1.0 mm: ±1.1°
Additional Linearity Error a Z-RFC-P02 / P04 / P08 Z-RFC-P20 / P23 / P31 0.5 mm: ±0.7° 1.0 mm: ±1.8°	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30			



Connector System M12

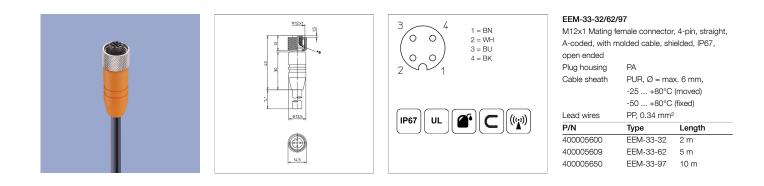



Protection class IP67 DIN EN 60529

Protection class IP68 DIN EN 60529



Very good Electromagnetic Compatibiliy (EMC) and shield systems

Very good resistance to oils, coolants and lubricants








Page 11

IP68



Signal Processing

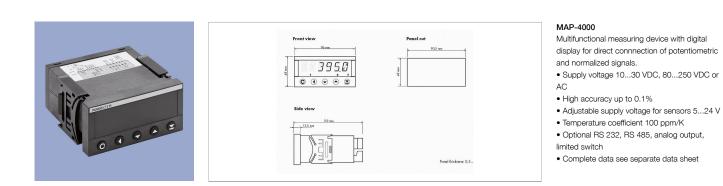



Connecting Options on request



M12 connector

- Customized lengths
- 3-, 4-, 6- and 8-pole versions
- Protection class IP68 Ordering codes of standard versions
- see ordering specifications



Molex Mini Fit jr.

- Customized length and lead wires
- 3-, 4- and 6-pole versions
 On request



Tyco AMP Super Seal • Pin- and bushing housing

- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67
- On request



- Molex Mini Fit jr. Customized length and lead wires 3-, 4- and 6-pole versions
- On request



Deutsch DTM 04

- Pin- and bushing housing
 Customized lengths
 3-, 4- and 6-pole versions
- Protection class IP67
- On request



Page 13

- ITT Cannon Sure Seal connector
- Customized lengths
- 3-, 4- and 6-pole versions Protection class IP67
- On request



Novotechnik Messwertaufnehmer OHG P.O.Box 4220 73745 Ostfildern (Germany) Horbstrasse 12 73760 Ostfildern (Germany) Phone +49 711 4489-0 Fax +49 711 4489-118 info@novotechnik.de www.novotechnik.de



© Nov 8, 2023

The specifications contained in our datasheets are intended solely for informational purposes. The documented specification values are based on ideal operational and environmental conditions and can vary significantly depending on the actual customer application. Using our products at or close to one or more of the specified performance ranges can lead to limitations regarding other performance parameters. It is therefore necessary that the end user verifies relevant performance parameters in the intended application. We reserve the right to change product specifications without notice.