NOVOHALL Rotary Sensor Touchless

RFC-4800

Voltage Mobile Applications





Special Features

- Touchless hall technology
- Electrical range up to 360°
- 2 part design, mechanically decoupled
- High protection class IP67, IP68, IP69
- Resolution up to 12 bit
- Wear-free
- Temperature range -40 °C to +105 °C
- One and multi-channel versions
- Optimized for use in mobile applications with highest EMC requirements such as ISO pulses and high interferences to ISO 11452 and ECE-Standard
- Suitable for safety-related applications according to DIN EN ISO 13849
- Other configurations see separate data sheets

Applications

- Mobile working machines (industrial trucks, construction machinery, agricultural and forestry machinery)
- Marine applications


The 2 part design consisting of sensor and magnetic position marker offers great flexibility when mounting. The absence of shaft and bearing makes the assembly much less sensitive to axial and radial application tolerances - separate couplings are obsolete. Measurements can be made transmissively through any non-ferromagnetic material. With its completely encapsulated electronics the sensor is perfectly suited for use in harsh environments. Single and multi-channel versions are available and suitable for use in safety-related applications.

D	
Description Material	Housing: high grade, temperature resistant plastic
Mounting	With 2 pan head screws M4x20 (included in delivery)
Fastening torque of mounting	250 Ncm
Electrical connection	Connector M12x1 or AMP Superseal with cable L = 0.15 m / Cable 4x 0.5 mm ² (AWG 20), TPE, unshielded / Lead wires 0.5 mm ² (AWG 20), PVC
Mechanical Data	
Dimensions	See dimension drawing
Mechanical travel	continuous
Weight (w/o connection)	approx. 50 g





Ordering Specifications

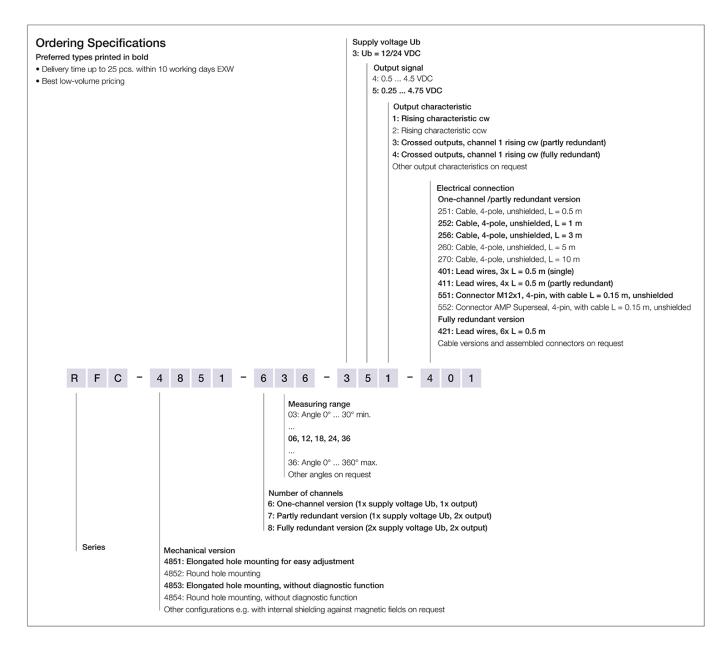


Accessories included in delivery


• 2x Pan head screws M4x20



Drawing

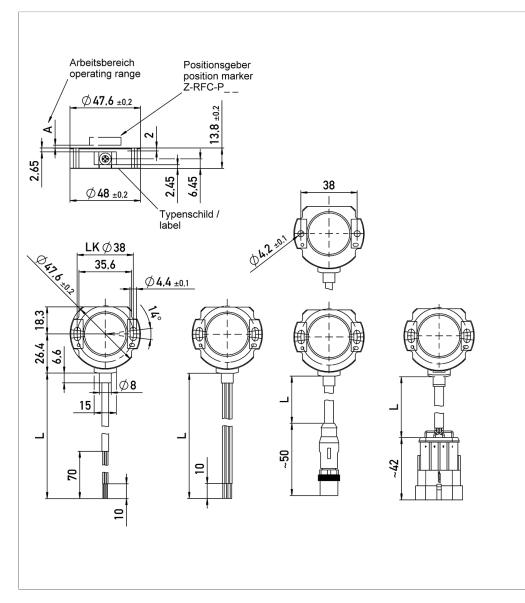

CAD data see www.novotechnik.de/en/download/caddata/



When the marking of the position marker is pointing towards the cable, the sensor output is near the electrical center position (index position).



Technical Data

Туре	RFC-483
Туре	Analog voltage
Output signal	0.25 4.75 V
Output signal	0.5 4.5 V
Load	≥ 10 kΩ
Number of channels	1/2
Diagnosis	activated (in case of error, output signal is outside of the plausible signal range)
Update rate	typ. 3.4 kHz
Measuring range	0 30° up to 0 360° in 10°-steps
Independent linearity	≤ ±0.5 %FS
Resolution	12 bits
Repeatability	typ. ≤ ±0.1°
Hysteresis	typ. < ±0.1°
	Only measuring range 360° : typ. < 0.25° (lower hysteresis on request)
Temperature error	Measuring range 30 170°; typ. ±1.0 %FS, Measuring range ≥ 180°: typ. ±0.5 %FS
Supply voltage Ub	12/24 VDC (8 34 VDC)
Current consumption w/o load	typ. 12 mA per channel
Polarity protection	yes (supply lines and outputs)
Short circuit protection	yes (vs. GND and supply voltage Ub)
Insulation resistance (500 VDC)	≥ 10 MΩ
Environmental Data	
Max. operational speed	Mechanically unlimited
Vibration IEC 60068-2-6	20 g, 5 2000 Hz, Amax = 0.75 mm
Shock IEC 60068-2-27	50 g, 6 ms
Protection class DIN EN 60529	IP67 (connector M12), IP67 / IP68 / IP69
Operating temperature	-40 +105°C*
	-25 + 85°C (connector M12)
	* The max. operating temperature depends on supply voltage Ub and load resp. burden (see temp. diagram),
Life	Mechanically unlimited
Functional safety	Suitable for safety-related applications according to ISO 13849 after customer validation.
	Further safety data (DCavg) and support for functional safety are available on request.
MTTF (IEC 60050)	766 years (one-channel), 488 years (partly redundant, per channel) or 383 years (fully redundant, per channel)
MTTFd (EN ISO 13849-1 parts count	1533 years (one-channel), 977 years (partly redundant, per channel) or 767 years (fully redundant, per channel)
method, w/o load)	
MTTFd-certificate	https://www.novotechnik.de/en/downloads/certificates/mttfd-certificates/
Traceability	Serial number on type labeling: production batch of the sensor assembly and relevant sensor components
Conformity/Approval	CE, UKCA, E1 see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk
	WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/
EMC Compatibility	
ISO 10605 ESD (Handling/Component)	8 kV / 15 kV
ISO 11452-2 Radiated HF-fields	100 V/m
ISO 11452-5 Radiated HF-Fields, stripline	200 V/m
CISPR 25 Radiated emission	Level 5
ISO 7637-2 Transient Emissions	Level 3
ISO 7637-2 Pulses on supply lines	(1, 2a, 2b, 3a, 3b, 4, 5) Level 4
ISO 7637-3 Pulses on output lines	Level 4
EN 13309 Construction machinery	
Emission/Immunity E1	acc. to ECE-R10
ISO 13766-1/-2 Construction machinery	Any multi-channel version

 $\mathsf{FS}=\mathsf{Full}$ scale: Signal span according to electrical measuring range

novotechnik Siedle Group

Connection Assignment


Signal	Connector	Cable	Lead wires	Connector	Cable	Lead wires	Lead wires
	code 5	code 2	code 4	code 5	code 2	code 4	code 4
	One-channel	One-channel	One-channel	Partly redundant	Partly redundant	Partly redundant	Fully redundant
Supply voltage Ub 1	Pin 1	GN	RD	Pin 1	GN	RD	RD
GND 1	Pin 3	BN	BK	Pin 3	BN	BK	BK
Signal output 1	Pin 2	WH	BU	Pin 2	WH	BU	BU
Signal output 2	-	-	-	Pin 4	YE	BU/WH	BU/WH
Supply voltage Ub 2	-	-	-	-	-	-	RD/WH
GND 2	-	-	-	-	-	-	BK/WH
Not assigned	Pin 4	YE	-	-	-	-	-









Technical Data Output Characteristics

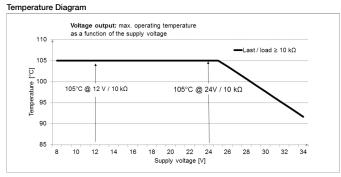


Output characteristic

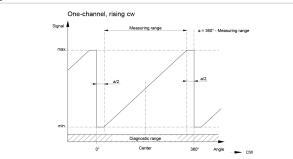


Output characteristic

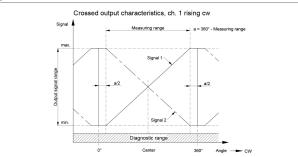


Output characteristic

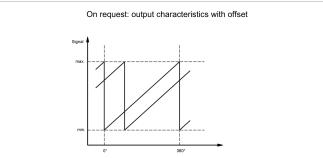


Output characteristic

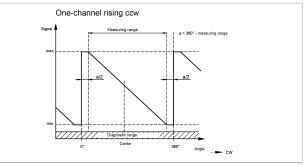


Output characteristic

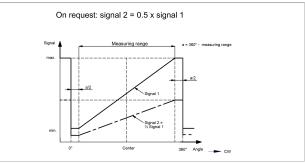


Output characteristic

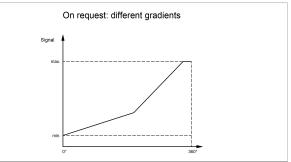




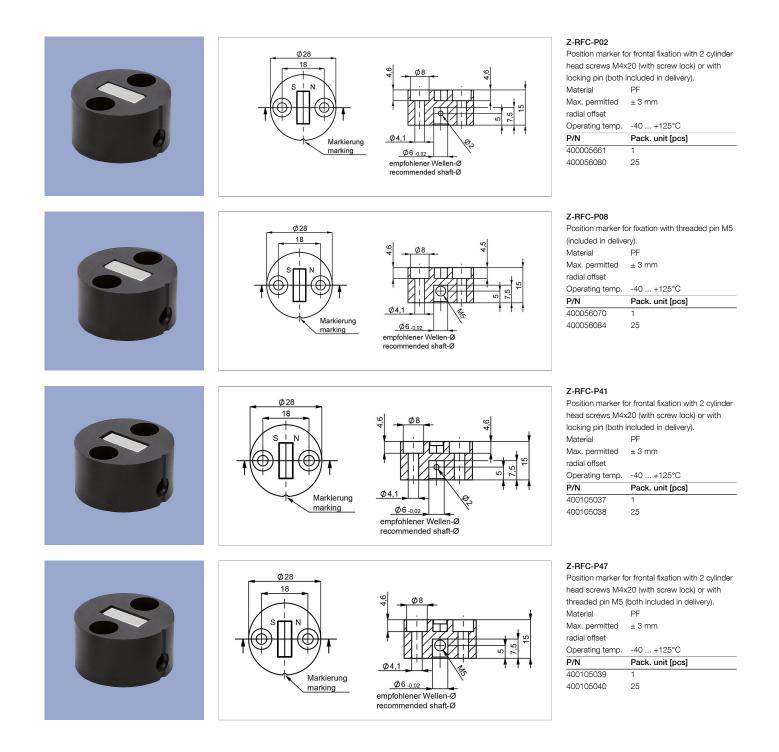




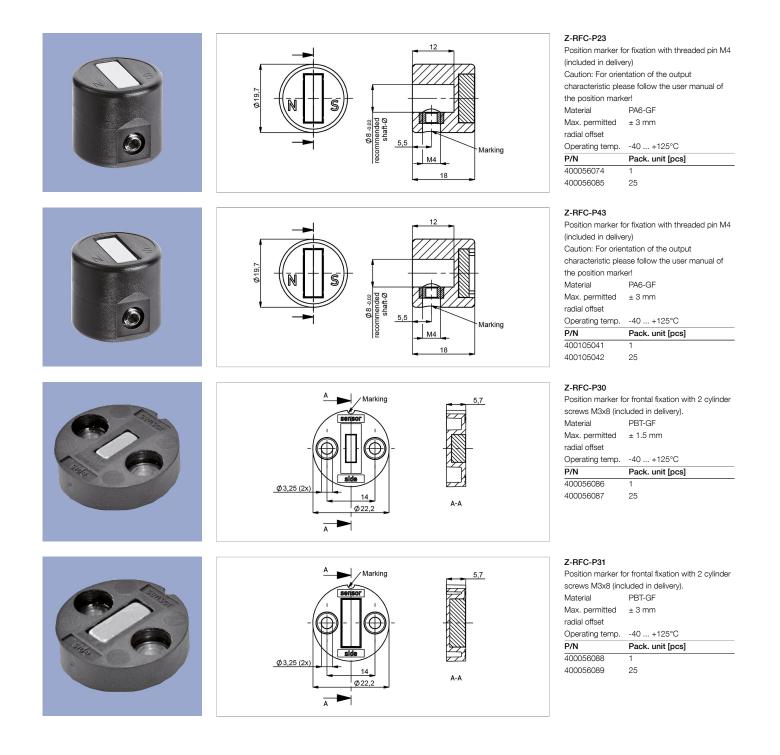



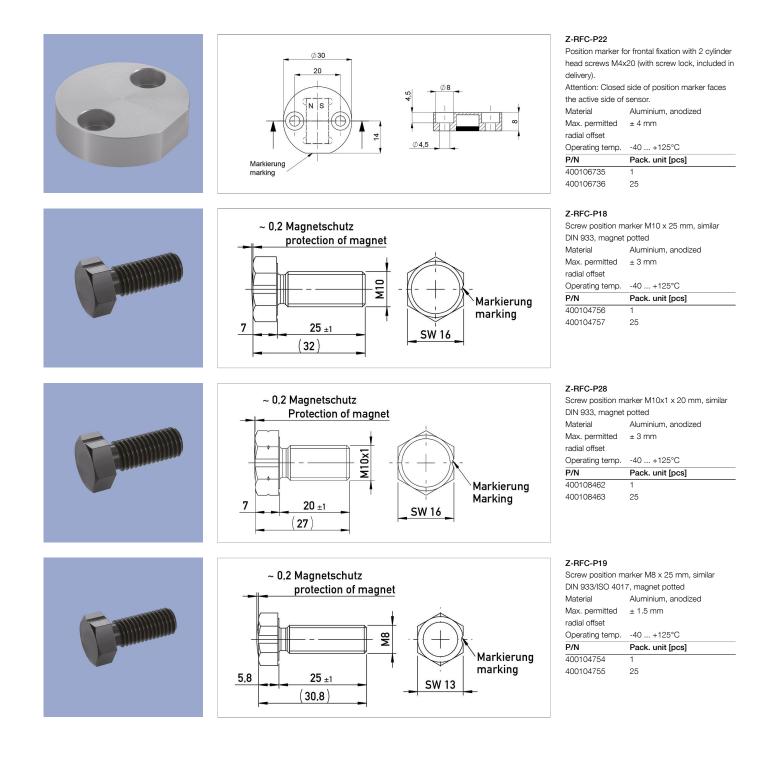



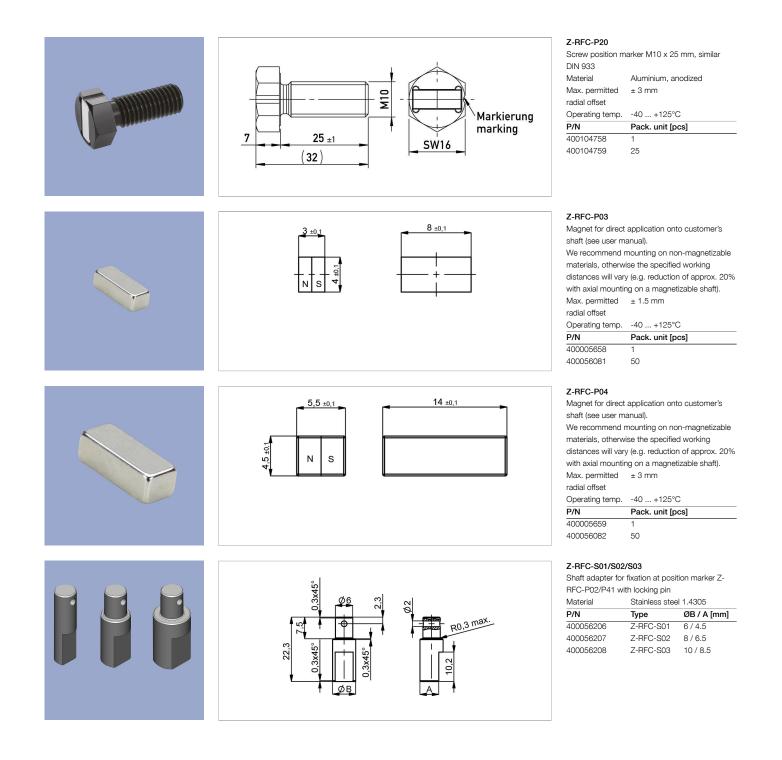




Working Distances Position Markers [mm] - One-channel Versions

	Z-RFC-P02 / P04 / P08 Z-RFC-P20 / P23 / P31	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
RFC-4851	2.3 5	0 2.7	0.7 2.2	0 4.5	0 2.2	4.4 9.2
RFC-4852						
with diagnosis						
RFC-4853	0 4	0 2.7	0 1.5	0 4.5	0 2.2	4.4 9.2
RFC-4854						
w/o diagnosis						

	Z-RFC-P02 / P04 / P08	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
	Z-RFC-P20 / P23 / P31					
RFC-4851	1.9 4.5	0 2.3	0.3 1.8	0 4	0 1.7	4 8.8
RFC-4852						
with diagnosis						
RFC-4853	04	0 2.3	0 1.5	0 4	0 1.7	4 8.8
RFC-4854						
w/o diagnosis						

Lateral Magnet Offset




Lateral magnet offset will cause additional linearity error. The angle error, which is caused by radial displacement of sensor and position marker depends on the used position marker or magnet.

Additional Linearity Error at Radial Displacement - One-channel Versions

Z-RFC-P02 / P04 / P08	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
Z-RFC-P20 / P23 / P31					
0.5 mm: ±0.4°	0.5 mm: ±0.4°	0.5 mm: ±1.4°	0.5 mm: ±0.7°	0.5 mm: ±1.3°	1.0 mm: ±0.8°
1.0 mm: ±1.1°	1.0 mm: ±1.1°	1.0 mm: ±3.7°	1.0 mm: ±1.3°	1.0 mm: ±2.6°	2.0 mm: ±1.8°
2.0 mm: +3.5°	2.0 mm: ±3.5°	2.0 mm: -	2.0 mm: ±3.3°	2.0 mm: -	4.0 mm: ±5.4°
	t Radial Displacement - Redun				
· · · · · · · · · · · · · · · · · · ·	t Radial Displacement - Redun Z-RFC-P41 / P43 / P47	dant Versions Z-RFC-P03 / P30	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
Z-RFC-P02 / P04 / P08			Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
Z-RFC-P02 / P04 / P08 Z-RFC-P20 / P23 / P31			Z-RFC-P18 / P28 0.5 mm: ±1.1°	Z-RFC-P19 0.5 mm: ±2.3°	Z-RFC-P22 1.0 mm: ±1.1°
Additional Linearity Error a Z-RFC-P02 / P04 / P08 Z-RFC-P20 / P23 / P31 0.5 mm: ±0.7° 1.0 mm: ±1.8°	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30			



Connector System M12

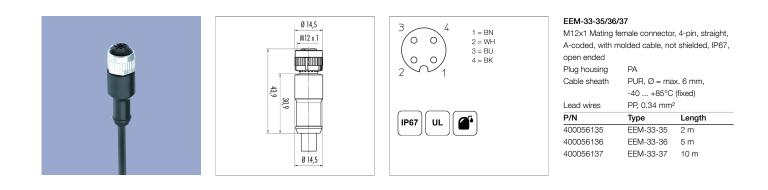



Protection class IP67 DIN EN 60529

Protection class IP68 DIN EN 60529



Very good Electromagnetic Compatibiliy (EMC) and shield systems

Very good resistance to oils, coolants and lubricants





Page 12

IP68



Connecting Options on request



M12 connector

- Customized lengths
- 3-, 4-, 6- and 8-pole versions
- Protection class IP68 Ordering codes of standard versions
- see ordering specifications



Molex Mini Fit jr.

- Customized length and lead wires
- 3-, 4- and 6-pole versions
 On request



Tyco AMP Super Seal • Pin- and bushing housing

- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67
- On request



- Molex Mini Fit jr. Customized length and lead wires 3-, 4- and 6-pole versions
- On request



Deutsch DTM 04

- Pin- and bushing housing
 Customized lengths
 3-, 4- and 6-pole versions
- Protection class IP67
- On request



Page 13

- ITT Cannon Sure Seal connector
- Customized lengths
- 3-, 4- and 6-pole versions Protection class IP67
- On request



Novotechnik Messwertaufnehmer OHG P.O.Box 4220 73745 Ostfildern (Germany) Horbstrasse 12 73760 Ostfildern (Germany) Phone +49 711 4489-0 Fax +49 711 4489-118 info@novotechnik.de www.novotechnik.de



© Nov 8, 2023

The specifications contained in our datasheets are intended solely for informational purposes. The documented specification values are based on ideal operational and environmental conditions and can vary significantly depending on the actual customer application. Using our products at or close to one or more of the specified performance ranges can lead to limitations regarding other performance parameters. It is therefore necessary that the end user verifies relevant performance parameters in the intended application. We reserve the right to change product specifications without notice.