

NOVOHALL Rotary Sensor Touchless

RFC-4800 Ratiometric Mobile Applications







approx. 50 g

Special Features

- Touchless hall technology
- Electrical range up to 360°
- 2 part design, mechanically decoupled
- High protection class IP67, IP68, IP69
- Resolution up to 12 bit
- Wear-free
- Temperature range -40 °C to +105 °C
- One and multi-channel versions
- Optimized for use in mobile applications with highest EMC requirements such as ISO pulses and high interferences to ISO 11452 and ECE-Standard
- Suitable for safety-related applications according to DIN EN ISO 13849
- Other configurations see separate data sheets

Applications

- Mobile working machines (industrial trucks, construction machinery, agricultural and forestry machinery)
- Marine applications

Weight (w/o connection)


The 2 part design consisting of sensor and magnetic position marker offers great flexibility when mounting. The absence of shaft and bearing makes the assembly much less sensitive to axial and radial application tolerances - separate couplings are obsolete. Measurements can be made transmissively through any non-ferromagnetic material.

With its completely encapsulated electronics the sensor is perfectly suited for use in harsh environments. Single and multi-channel versions are available and suitable for use in safety-related applications.

Description	
Material	Housing: high grade, temperature resistant plastic
Mounting	With 2 pan head screws M4x20 (included in delivery)
Fastening torque of mounting	250 Ncm
Electrical connection	Cable 4x 0.5 mm² (AWG 20), TPE, unshielded / Connector M12x1 or AMP Superseal with cable L = 0.15 m / Lead wires 0.5 mm² (AWG 20), PVC
Mechanical Data	
Dimensions	See dimension drawing
Mechanical travel	continuous



Ordering Specifications

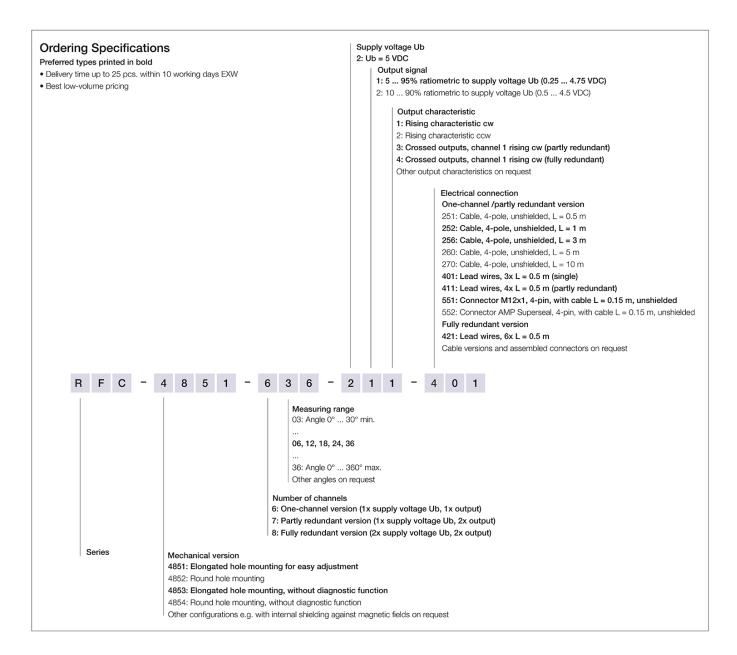


Accessories included in delivery


• 2x Pan head screws M4x20



Drawing

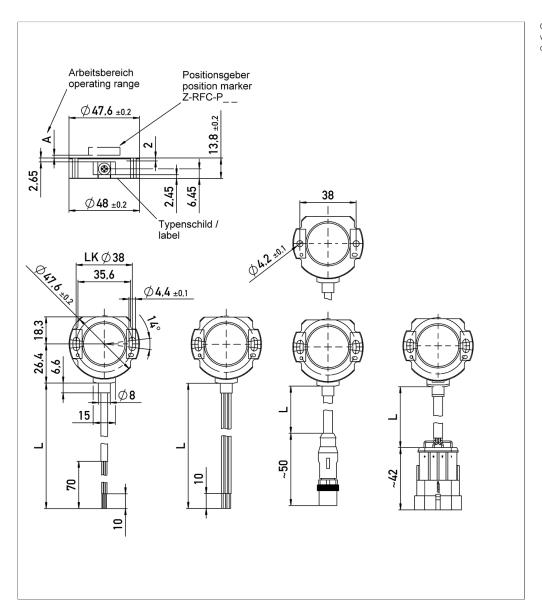

CAD data see www.novotechnik.de/en/download/caddata/



When the marking of the position marker is pointing towards the cable, the sensor output is near the electrical center position (index position).



Technical Data

Time	DEC 40
Туре	RFC-482 Ratiometric
Output signal	ratiometric to supply voltage Ub
Output signal	5 95% (0.25 4.75 V)
	10 90% (0.5 4.5 V)
Load	≥5 kΩ
Number of channels	1/2
Diagnosis	activated (in case of error, output signal is outside of the plausible signal range)
Update rate	typ. 3.4 Hz
Measuring range	0 30° up to 0 360° in 10°-steps
Independent linearity	5 ±0.5 %FS
Resolution	1 2 bits
Repeatability	typ. ≤ ±0.1°
Hysteresis	typ. < ±0.1°
Trysteresis	Only measuring range 360°: typ. < 0.25° (lower hysteresis on request)
Temperature error	Measuring range 30 170°: typ. ±0.7 %FS, Measuring range ≥ 180°: typ. ±0.35 %FS
Supply voltage Ub	5 VDC (4.5 5.5 VDC)
Current consumption w/o load	typ. 12 mA per channel
Polarity protection	yes (supply lines and outputs)
Short circuit protection	yes (vs. GND and supply voltage Ub)
Insulation resistance (500 VDC)	> 10 MQ
Environmental Data	2 10 IVIS2
Max. operational speed	Mechanically unlimited
Vibration IEC 60068-2-6	20 g, 5 2000 Hz, Amax = 0.75 mm
Shock IEC 60068-2-27	50 g, 6 ms
Protection class DIN EN 60529	IP67 / IP68 / IP69, IP67 (connector M12)
Operating temperature	-40 +105°C, -40 +85°C (connector M12)
Life	Mechanically unlimited
Functional safety	Suitable for safety-related applications according to ISO 13849 after customer validation.
	Further safety data (DCavg) and support for functional safety are available on request.
MTTF (IEC 60050)	1652 years (one-channel), 824 years (partly redundant, per channel) or 826 years (fully redundant, per channel)
MTTFd (EN ISO 13849-1 parts count	3304 years (one-channel), 1648 years (partly redundant, per channel) or 1653 years (fully redundant, per channel)
method, w/o load)	
MTTFd-certificate	https://www.novotechnik.de/en/downloads/certificates/mttfd-certificates/
Traceability	Serial number on type labeling: production batch of the sensor assembly and relevant sensor components
Conformity/Approval	CE, UKCA, E1 see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk
3. Ph	WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/
EMC Compatibility	
ISO 10605 ESD (Handling/Component)	8 kV / 15 kV
ISO 11452-2 Radiated HF-fields	100 V/m
ISO 11452-5 Radiated HF-Fields, stripline	200 V/m
CISPR 25 Radiated emission	Level 5
EN 13309 Construction machinery	
Emission/Immunity E1	acc. to ECE-R10
ISO 13766-1/-2 Construction machinery	On request
	•

FS = Full scale: Signal span according to electrical measuring range



Connection Assignment


Signal	Cable	Connector	Lead wires	Cable	Connector	Lead wires	Lead wires
	code 2	code 5	code 4	code 2	code 5	code 4	code 4
	One-channel	One-channel	One-channel	Partly redundant	Partly redundant	Partly redundant	Fully redundant
Supply voltage Ub 1	GN	Pin 1	RD	GN	Pin 1	RD	RD
GND 1	BN	Pin 3	BK	BN	Pin 3	BK	BK
Signal output	WH	Pin 2	BU	WH	Pin 2	BU	BU
Signal output 2	-	-	-	YE	Pin 4	BU/WH	BU/WH
Supply voltage Ub 2	-	-	-	-	-	-	RD/WH
GND 2	-	-	-	-	-	-	BK/WH
Not assigned	YE	Pin 4	-	-	-	-	-











Technical Data Output Characteristics

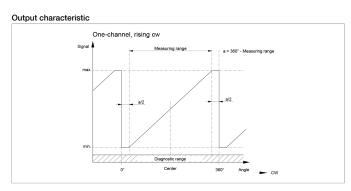


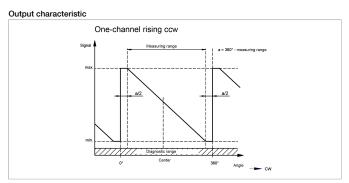


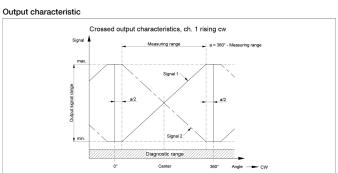


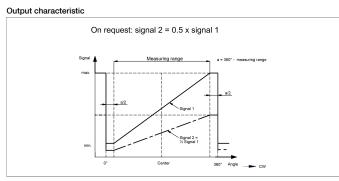

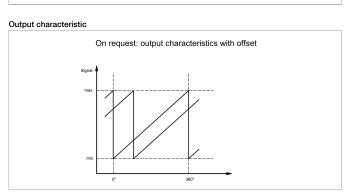

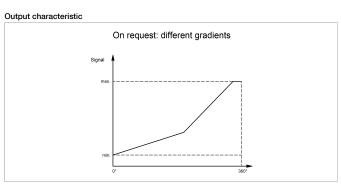


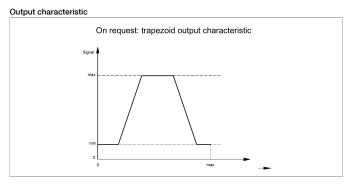

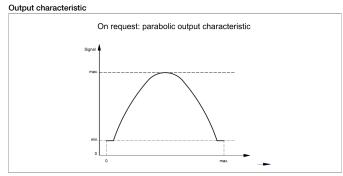





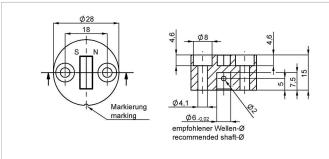

Position marker for frontal fixation with 2 cylinder head screws M4x20 (with screw lock) or with locking pin (both included in delivery).


Material PF

Max. permitted ± 3 mm radial offset

Operating temp. -40 ... +125°C

P/N Pack. unit [pcs] 400005661 400056080 25



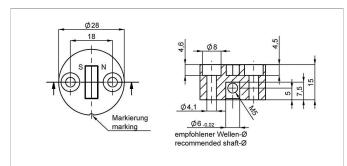

Z-RFC-P08

Position marker for fixation with threaded pin M5

(included in delivery).


PF Material Max. permitted ± 3 mm

radial offset

Operating temp. -40 ... +125°C

Pack. unit [pcs] P/N 400056070 400056084 25



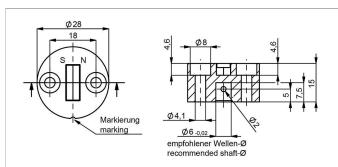

Z-RFC-P41

Position marker for frontal fixation with 2 cylinder head screws M4x20 (with screw lock) or with locking pin (both included in delivery).

Material


Max. permitted ± 3 mm

radial offset

Operating temp. -40 ... +125°C

P/N Pack. unit [pcs] 400105037 400105038 25



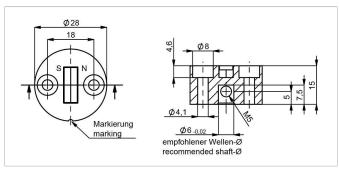

Position marker for frontal fixation with 2 cylinder head screws M4x20 (with screw lock) or with threaded pin M5 (both included in delivery). PF

Material

Max. permitted ± 3 mm


radial offset

Operating temp. -40 ... +125°C P/N Pack. unit [pcs]

400105039 400105040 25





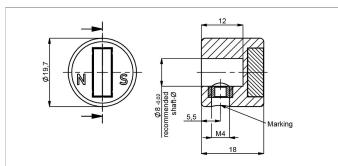

Position marker for fixation with threaded pin M4 (included in delivery)

Caution: For orientation of the output

characteristic please follow the user manual of

the position marker!


Material PA6-GF Max. permitted ± 3 mm

radial offset

Operating temp. -40 ... +125°C

P/N Pack. unit [pcs] 400056074 400056085 25



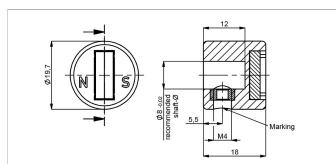

Z-RFC-P43

Position marker for fixation with threaded pin M4 (included in delivery)

Caution: For orientation of the output

characteristic please follow the user manual of

the position marker!


Material PA6-GF Max. permitted ± 3 mm

radial offset

-40 ... +125°C Operating temp.

Pack. unit [pcs] 400105041 400105042 25



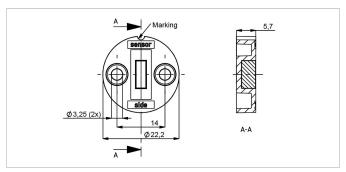

Z-RFC-P30

Position marker for frontal fixation with 2 cylinder

screws M3x8 (included in delivery).


PBT-GF Max. permitted ± 1.5 mm

radial offset

Operating temp. -40 ... +125°C

P/N Pack. unit [pcs] 400056086 400056087 25



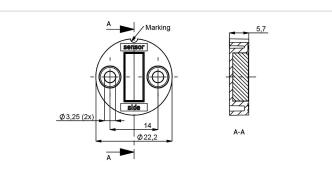

Position marker for frontal fixation with 2 cylinder

screws M3x8 (included in delivery).


PBT-GF Material Max. permitted


radial offset

Operating temp. -40 ... +125°C

P/N Pack. unit [pcs] 400056088 400056089





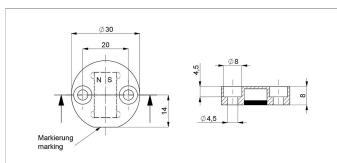

Z-RFC-P22

Position marker for frontal fixation with 2 cylinder head screws M4x20 (with screw lock, included in

Attention: Closed side of position marker faces the active side of sensor.


Material Aluminium, anodized

Max. permitted ± 4 mm radial offset

Operating temp. -40 ... +125°C

P/N Pack. unit [pcs] 400106735



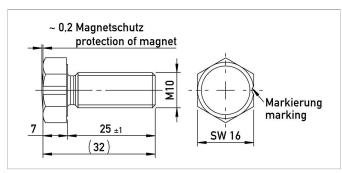

Z-RFC-P18

400106736

Screw position marker M10 x 25 mm, similar

DIN 933, magnet potted

Material Aluminium, anodized

25


Max. permitted ± 3 mm

radial offset

Operating temp. -40 ... +125°C

P/N Pack. unit [pcs] 400104756 400104757 25



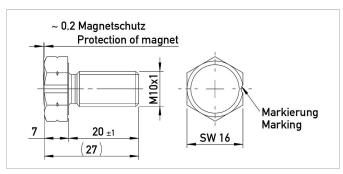

Z-RFC-P28

Screw position marker M10x1 x 20 mm, similar

DIN 933, magnet potted

Material Aluminium, anodized ± 3 mm


Max. permitted radial offset

Operating temp. -40 ... +125°C

P/N Pack. unit [pcs]

400108462 400108463 25



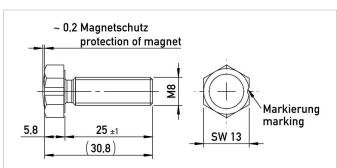

Screw position marker M8 x 25 mm, similar DIN 933/ISO 4017, magnet potted

Material Aluminium, anodized


Max. permitted ± 1.5 mm radial offset

Operating temp.

-40 ... +125°C P/N Pack. unit [pcs] 400104754 400104755 25





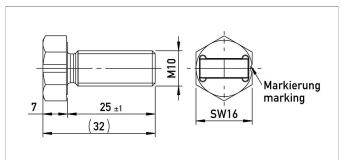

Z-RFC-P20

Screw position marker M10 x 25 mm, similar

DIN 933

Material Aluminium, anodized

Max. permitted ± 3 mm


radial offset

Operating temp. -40 ... +125°C

P/N Pack. unit [pcs]

400104758 1 400104759 25



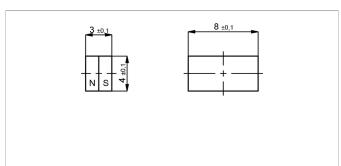

Z-RFC-P03

Magnet for direct application onto customer's shaft (see user manual).

We recommend mounting on non-magnetizable materials, otherwise the specified working distances will vary (e.g. reduction of approx. 20% with axial mounting on a magnetizable shaft).

Max. permitted ± 1.5 mm

radial offset


Operating temp. -40 ... +125°C

 P/N
 Pack. unit [pcs]

 400005658
 1

 400056081
 50



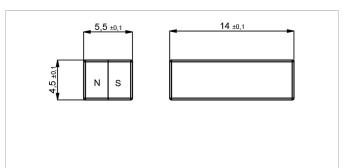

Z-RFC-P04


Magnet for direct application onto customer's shaft (see user manual).


We recommend mounting on non-magnetizable materials, otherwise the specified working distances will vary (e.g. reduction of approx. 20% with axial mounting on a magnetizable shaft).

Max. permitted \pm 3 mm

radial offset

40005659 1 400056082 50



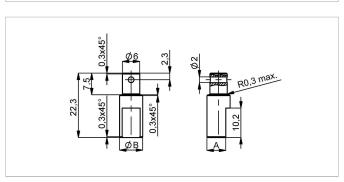

Z-RFC-S01/S02/S03

Shaft adapter for fixation at position marker Z-RFC-P02/P41 with locking pin

P/N		Stainless steel 1.4305			
		Туре	ØB / A [mm]		
400	056206	Z-RFC-S01	6 / 4.5		
400	056207	Z-RFC-S02	8 / 6.5		
400056208		Z-RFC-S03	10 / 8.5		




Working Distances Position Markers [mm] - One-channel Versions

•						
	Z-RFC-P02 / P04 / P08	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
	Z-RFC-P20 / P23 / P31					
RFC-4851	2.3 5	0 2.7	0.7 2.2	0 4.5	0 2.2	4.4 9.2
RFC-4852						
with diagnosis						
RFC-4853	0 4	0 2.7	0 1.5	0 4.5	0 2.2	4.4 9.2
RFC-4854						
w/o diagnosis						

Working Distances Position Markers [mm] - Redundant Versions

	Z-RFC-P02 / P04 / P08	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
	Z-RFC-P20 / P23 / P31					
RFC-4851	1.9 4.5	0 2.3	0.3 1.8	0 4	0 1.7	4 8.8
RFC-4852						
with diagnosis						
RFC-4853	0 4	0 2.3	0 1.5	0 4	0 1.7	4 8.8
RFC-4854						
w/o diagnosis						

Lateral Magnet Offset



Lateral magnet offset will cause additional linearity error. The angle error, which is caused by radial displacement of sensor and position marker depends on the used position marker or magnet.

Additional Linearity Error at Radial Displacement - One-channel Versions

Z-RFC-P02 / P04 / P08 Z-RFC-P20 / P23 / P31	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22
0.5 mm: ±0.4°	0.5 mm: ±0.4°	0.5 mm: ±1.4°	0.5 mm: ±0.7°	0.5 mm: ±1.3°	1.0 mm: ±0.8°
1.0 mm: ±1.1°	1.0 mm: ±1.1°	1.0 mm: ±3.7°	1.0 mm: ±1.3°	1.0 mm: ±2.6°	2.0 mm: ±1.8°
2.0 mm: ±3.5°	2.0 mm: ±3.5°	2.0 mm: -	2.0 mm: ±3.3°	2.0 mm: -	4.0 mm: ±5.4°


Additional Linearity Error at Radial Displacement - Redundant Versions


Z-RFC-P02 / P04 / P08	Z-RFC-P41 / P43 / P47	Z-RFC-P03 / P30	Z-RFC-P18 / P28	Z-RFC-P19	Z-RFC-P22	
Z-RFC-P20 / P23 / P31						
0.5 mm: ±0.7°	0.5 mm: ±0.7°	0.5 mm: ±2.5°	0.5 mm: ±1.1°	0.5 mm: ±2.3°	1.0 mm: ±1.1°	
1.0 mm: ±1.8°	1.0 mm: ±1.8°	1.0 mm: ±6.4°	1.0 mm: ±2°	1.0 mm: ±4.5°	2.0 mm: ±2.4°	
2.0 mm: ±5,2°	2.0 mm: ±5.2°	2.0 mm: -	2.0 mm: ±4.6°	2.0 mm: -	4.0 mm: ±6.7°	



Connector System M12







EEM-33-35/36/37

M12x1 Mating female connector, 4-pin, straight, A-coded, with molded cable, not shielded, IP67,

open ended

Plug housing PA

Cable sheath PUR, $\emptyset = \text{max. 6 mm}$,

-40 ... +85°C (fixed)

Lead wires PP, 0.34 mm²

P/N		Туре	Length	
	400056135	EEM-33-35	2 m	
	400056136	EEM-33-36	5 m	
	400056137	EEM-33-37	10 m	

IP67 Protection class IP67 DIN EN 60529

IP68 Protection class IP68 DIN EN 60529



Very good Electromagnetic Compatibiliy (EMC) and shield systems



Very good resistance to oils, coolants and lubricants



Suited for applications in dragchains



UL - approved





Connecting Options on request



M12 connector

- Customized lengths
- 3-, 4-, 6- and 8-pole versions
- Protection class IP68
- Ordering codes of standard versions see ordering specifications



Molex Mini Fit jr.

- Customized length and lead wires
- 3-, 4- and 6-pole versions
 On request



Tyco AMP Super Seal

- Pin- and bushing housing
- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67
- On request



- Molex Mini Fit jr.

 Customized length and lead wires

 3-, 4- and 6-pole versions



Deutsch DTM 04

- Pin- and bushing housing
 Customized lengths
 3-, 4- and 6-pole versions

- Protection class IP67
- On request



ITT Cannon Sure Seal connector

- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67





Novotechnik Messwertaufnehmer OHG P.O.Box 4220 73745 Ostfildern (Germany) Horbstrasse 12 73760 Ostfildern (Germany) Phone +49 711 4489-0 Fax +49 711 4489-118 info@novotechnik.de www.novotechnik.de



© Nov 8, 2023