

Project item
Please contact your local distributor or our technical support
Phone (+49) 711 4489-250
support@novotechnik.de

NOVOHALL Rotary Sensor Touchless

RFC-4800 Incremental Mobile Applications







Special Features

- Touchless hall technology
- Electrical range 360°
- 2 part design, mechanically decoupled
- Wear-free
- High protection class IP67, IP68, IP69
- Resolution up to 12 bits
- Temperature range -40 °C to +85 °C
- For very high rotational speeds
- Other configurations see separate data sheets

Applications

- Mobile working machines (industrial trucks, construction machinery, agricultural and forestry machinery)
- Marine applications


The 2 part design consisting of sensor and magnetic position marker offers great flexibility when mounting. The absence of shaft and bearing makes the assembly much less sensitive to axial and radial application tolerances - separate couplings are obsolete. Measurements can be made transmissively through any non-ferromagnetic material.

The sensor is perfectly suitable for use in harsh environmental conditions through the completely encapsulated electronics.

Description			
Material	Housing: high grade, temperature resistant plastic		
Mounting	With 2 pan head screws M4x20 (included in delivery)		
Fastening torque of mounting	250 Ncm		
Electrical connection	Lead wires 0.5 mm² (AWG 20), PVC / Connector M12x1, A-coded with cable L = 0.15 m / Cable 4x 0.5 mm² (AWG 20), TPE, unshielded		
Mechanical Data			
Dimensions	See dimension drawing		
Mechanical travel	continuous		
Weight (w/o connection)	approx. 50 g		



Ordering Specifications

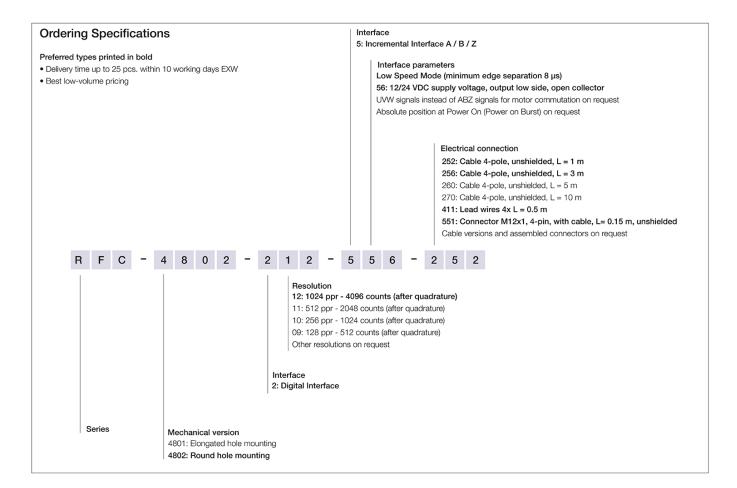


Accessories included in delivery

• 2x Pan head screws M4x20



Drawing

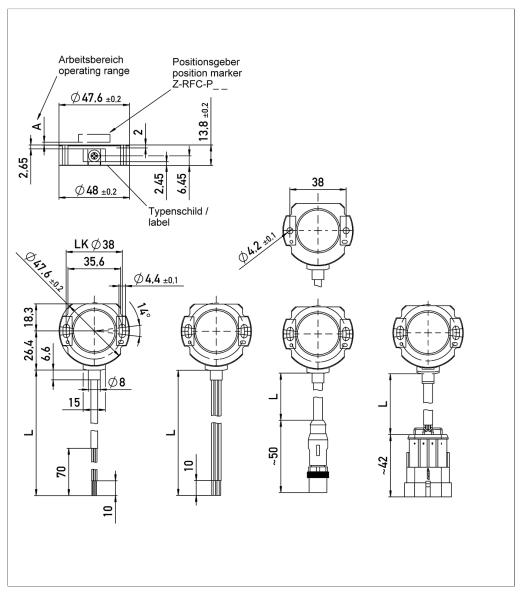

CAD data see www.novotechnik.de/en/download/caddata/



Rotational direction CW: A leads before B.



Technical Data

Туре	RFC-48212-556	RFC-48211-556	RFC-48210-556	RFC-48209-556	
	Incremental Open				
	Collector				
Outputs	A- / B-				
Level	Open Collector				
Pulses per revolution	1024 ppr	512 ppr	256 ppr	128 ppr	
Counts per revolution	4096 after quadrature	2048 after quadrature	1024 after quadrature	512 after quadrature	
Minimum edge separation	8 µs				
Min. input frequency of	32 kHz				
counter input	Valid for 128 and 256 ppr: The requirement for the minimum input frequency of counter input is reduced at lower speed (see charts).				
Max. operational speed	580 rpm	3,500 rpm	7,200 rpm	14,400 rpm	
Measuring range	360°				
Independent linearity	≤ ±0.5 %FS				
Repeatability	≤ ±0.2°				
Hysteresis	≤ ±0.7°, lower hysteresis or	n request			
Temperature error	±0.375 %FS				
Supply voltage Ub	12/24 VDC (9 34 VDC)		,		
Current consumption w/o load	typ. 10 mA				
Overvoltage protection	60 VDC (10 min.)				
Polarity protection	yes (supply lines)				
Short circuit protection	yes (all outputs vs. GND an	d supply voltage)			
Load outputs vs. supply voltage Ub	20 mA per channel				
Insulation resistance (500 VDC)	≥ 10 MΩ				
Environmental Data					
Vibration IEC 60068-2-6	20 g, 5 2000 Hz, Amax =	= 0.75 mm			
Shock IEC 60068-2-27	50 g, 6 ms				
Protection class DIN EN 60529	IP67 / IP68 / IP69, IP67 (cc	nnector M12)			
Operating temperature	-40 +85°C, -25 +85°C	C (connector M12)			
Life	Mechanically unlimited				
Functional safety	If you need assistance in us	sing our products in safety-rela	ated systems, please contact us	3	
MTTF (IEC 60050)	1154 years				
Traceability	Serial number on type label	ing: production batch of the s	ensor assembly and relevant se	nsor components	
Conformity/Approval	CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk				
	WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/				
EMC Compatibility					
ISO 10605 ESD (Handling/Component)	8 kV / 15 kV				
ISO 11452-2 Radiated HF-fields	200 V/m				
ISO 11452-5 Radiated HF-Fields, stripline	200 V/m				
CISPR 25 Radiated emission	Level 5				
ISO 7637-2 Pulses on supply lines	(1) Level 3, (2a, 2b, 3a, 3b,	4 E) Lovol 4			

FS = Full scale: Signal span according to electrical measuring range

Connection Assignment


Lead wires	Connector	Cable
code 4	code 5	code 2
BU	Pin 1	GN
RD	Pin 2	WH
BK	Pin 3	BN
BU/WH	Pin 4	YE
	code 4 BU RD BK	code 4 code 5 BU Pin 1 RD Pin 2 BK Pin 3






Technical Data

Incremental protocol Pulse width edge separation Position

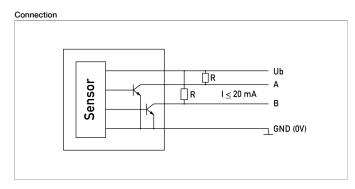


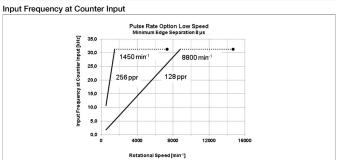



Position Markers



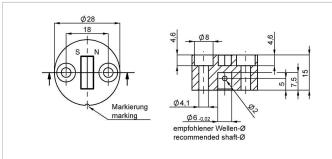


Position marker for frontal fixation with 2 cylinder head screws M4x20 (with screw lock) or with locking pin (both included in delivery).

Material PF

Max. permitted ± 3 mm radial offset

Operating temp. -40 ... +125°C P/N Pack. unit [pcs] 400005661 400056080 25



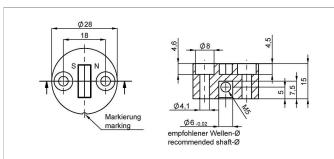

Z-RFC-P08

Position marker for fixation with threaded pin M5

(included in delivery).


PF Material Max. permitted ± 3 mm

radial offset

Operating temp. -40 ... +125°C Pack. unit [pcs] P/N

400056070 400056084 25



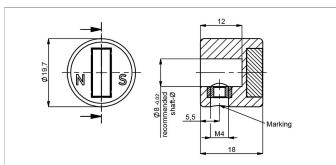

Z-RFC-P23

Position marker for fixation with threaded pin M4

(included in delivery)

Caution: For orientation of the output characteristic please follow the user manual of

the position marker!


Material PA6-GF Max. permitted ± 3 mm

radial offset

Operating temp. -40 ... +125°C P/N Pack. unit [pcs]

400056074 400056085



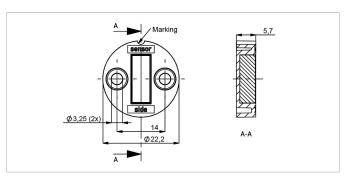

Z-RFC-P31

Position marker for frontal fixation with 2 cylinder

screws M3x8 (included in delivery). Material PBT-GF Max. permitted ± 3 mm

radial offset


-40 ... +125°C

Operating temp. P/N Pack. unit [pcs] 400056088 400056089 25



Position Markers



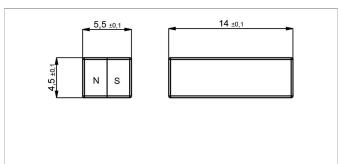

Z-RFC-P04

Magnet for direct application onto customer's shaft (see user manual).

We recommend mounting on non-magnetizable materials, otherwise the specified working distances will vary (e.g. reduction of approx. 20% with axial mounting on a magnetizable shaft).

Max. permitted ± 3 mm radial offset


Operating temp. -40 ... +125°C

 P/N
 Pack. unit [pcs]

 400005659
 1

 400056082
 50



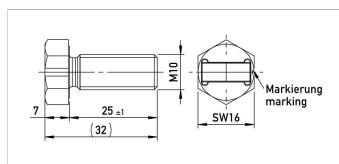

Z-RFC-P20

Screw position marker M10 x 25 mm, similar

DIN 933

Material Aluminium, anodized

Max. permitted $\pm 3 \text{ mm}$


radial offset


Operating temp. -40 ... +125°C

 P/N
 Pack. unit [pcs]

 400104758
 1

 400104759
 25



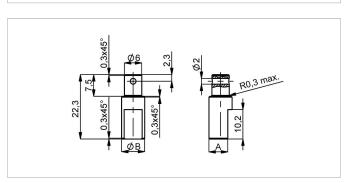

Z-RFC-S01/S02/S03

Shaft adapter for fixation at position marker Z-RFC-P02/P41 with locking pin

Material	Stainless steel 1.4305			
P/N	Туре	ØB / A [mm]		
400056206	Z-RFC-S01	6 / 4.5		
400056207	Z-RFC-S02	8 / 6.5		
400056208	Z-RFC-S03	10 / 8.5		




Position Markers

Working Distances Position Markers [mm] - One-channel Versions

Z-RFC-P02 / P04 / P08 Z-RFC-P20 / P23 / P31

0 ... 1.4

Lateral Magnet Offset



Lateral magnet offset will cause additional linearity error. The angle error, which is caused by radial displacement of sensor and position marker depends on the used position marker or magnet.

Additional Linearity Error at Radial Displacement - One-channel Versions

Z-RFC-P02 / P04 / P08

Z-RFC-P20 / P23 / P31

0.5 mm: ±0.4°


1.0 mm: ±0.7°


2.0 mm: ±2.2°



Connector System M12







EEM-33-35/36/37

M12x1 Mating female connector, 4-pin, straight, A-coded, with molded cable, not shielded, IP67,

open ended

Plug housing PA

Cable sheath PUR, $\emptyset = \text{max. 6 mm}$,

-40 ... +85°C (fixed)

Lead wires PP, 0.34 mm²

, • . •		
Туре	Length	
EEM-33-35	2 m	_
EEM-33-36	5 m	
EEM-33-37	10 m	
	Type EEM-33-35 EEM-33-36	Type Length EEM-33-35 2 m EEM-33-36 5 m

IP67 Protection class IP67 DIN EN 60529

IP68 Protection class IP68 DIN EN 60529



Very good Electromagnetic Compatibiliy (EMC) and shield systems



Very good resistance to oils, coolants and lubricants



Suited for applications in dragchains



UL - approved





Connecting Options on request



M12 connector

- Customized lengths
- 3-, 4-, 6- and 8-pole versions
- Protection class IP68
- Ordering codes of standard versions see ordering specifications



Molex Mini Fit jr.

- Customized length and lead wires
- 3-, 4- and 6-pole versions
 On request



Tyco AMP Super Seal

- Pin- and bushing housing
- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67
- On request



- Molex Mini Fit jr.

 Customized length and lead wires

 3-, 4- and 6-pole versions



Deutsch DTM 04

- Pin- and bushing housing
 Customized lengths
 3-, 4- and 6-pole versions

- Protection class IP67
- On request



ITT Cannon Sure Seal connector

- Customized lengths
- 3-, 4- and 6-pole versions
- Protection class IP67



- On request



Novotechnik Messwertaufnehmer OHG P.O.Box 4220 73745 Ostfildern (Germany) Horbstrasse 12 73760 Ostfildern (Germany) Phone +49 711 4489-0 Fax +49 711 4489-118 info@novotechnik.de www.novotechnik.de



© Nov 8, 2023