

NOVOHALL Rotary Sensor Non-contacting

RSA-3200 CANopen

**Mobile Applications** 









#### **Special Features**

- Touchless hall technology
- Electrical range 360°
- High protection class IP67 resp. IP69K (housing side)
- Resolution 14 bits
- Temperature range -40°C to +105°C
- One and multi-channel versions
- Optimized for use in mobile applications with highest EMC requirements such as ISO pulses and high interferences to ISO 11452, exceeds E1 requirements
- Suitable for linkage lever mounting
- Other configurations see separate data sheets

### **Applications**

- Mobile working machines (industrial trucks, construction machinery, agricultural and forestry machinery)
- Marine applications

Mobile working machines or truck conveyors place very high demands on the sensor system due to the external application. The very compact angle sensor RSA-3200 offers reliable function under harsh operating conditions.


The sensor is optimized for mobile applications and is certified according to the highest EMC standards such as ISO pulses and interference fields according to ISO 11452. Available are one and multi-channel versions.

The stainless steel shaft is designed for assembling of linkage levers.

Description			
Material	Housing: high grade, temperature resistant plastic PBT-GF with stainless steel inserts		
	Shaft: stainless steel, X10CrNiS18-9 1.4305 / AISI 303		
	Sealing: HNBR 70		
Mounting	With 2 screws M4		
Fastening torque of mounting	250 ± 50 Ncm		
Bearing	Sintered bronze bushing		
Sealing	Double O-ring seal, electronics completely encapsulated		
Electrical connection	6-pin MQS-connector, code A, tinned contact according to drawing AMP-114-18063-126, Index A1 (Connector: AMP P/N 1-967616-1)		
Mechanical Data			
Dimensions	See dimension drawing		
Mechanical travel	continuous		
Permitted shaft load (static)	40 N (axial) / 50 N (radial)		
Torque	Typ. 1.5 Ncm		
	Depending on the environmental temperature and standstill time, the necessary force for the inital operating of the shaft may increase		
Weight	approx. 45 g		




# Ordering Specifications

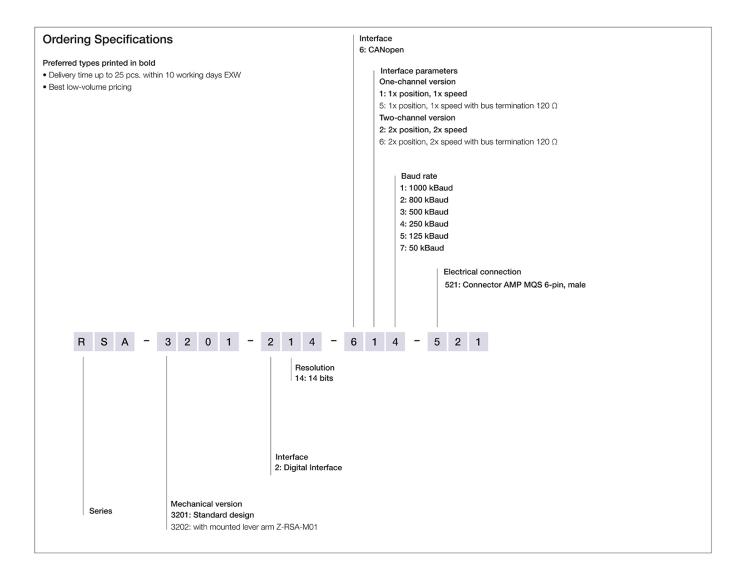




# Drawing

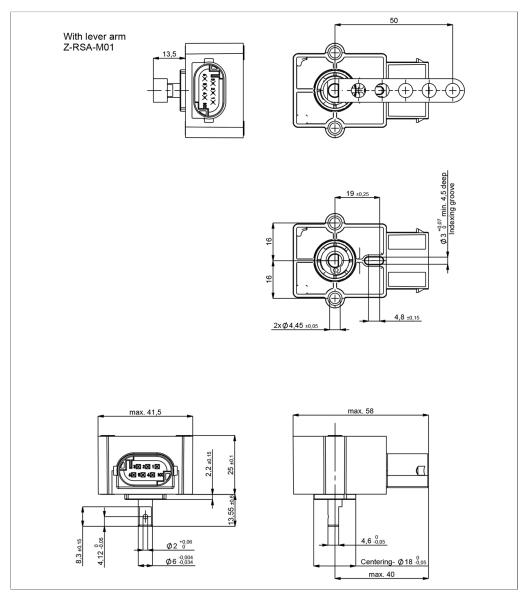

CAD data see www.novotechnik.de/en/download/caddata/



When the flattening of the shaft points towards the connector, the sensor is near the electrical center position.



# **Technical Data**



Туре	RSA-32214-6521		
	CANopen		
Measured variables	Position and speed		
Measuring range	360°		
Number of channels	1/2		
Protocol	CANopen protocol to CiA DS-301 V4.2.0, Device profile DS-406 V3.2 Encoder Class C2, LSS services to CiA DS-305 V1.1.2		
Programmable parameters	Position, speed, cams, working areas, rotating direction, scale, offset, node ID, baud rate		
Diagnosis	activated (in case of error, output signal is outside of the plausible signal range)		
Node ID	1 127 (default 127)		
Baud rate	50 1000 kBaud		
Update rate (output)	1 kHz		
Resolution	14 bits		
Resolution speed	360°/2^14 ≈ 0.022°/ms		
Absolute linearity	1 Channel: ±0.5 %FS, 2 Channels: ±0.85 %FS		
Repeatability	≤±0.1°		
Hysteresis	≤±0.1°		
Temperature error	±0.2 %FS		
Supply voltage Ub	12/24 VDC (8 34 VDC)		
Current consumption at Power-on	≤ 50 mA		
Power drain w/o load	< 0.4 W		
Overvoltage protection	45 VDC (permanent)		
Polarity protection	yes (supply lines)		
Short circuit protection	yes (output vs. GND and supply voltage up to 40 VDC)		
Insulation resistance (500 VDC)	≥ 10 MΩ		
Bus termination internal	120 $\Omega$ (optionally)		
Environmental Data			
Max. operational speed	120 rpm (temporary 800 rpm)		
Vibration IEC 60068-2-6	20 g, 5 2000 Hz, Amax = 0.75 mm		
Shock IEC 60068-2-27	50 g, 6 ms		
Protection class DIN EN 60529	IP67 (shaft side), IP69K (housing incl. electronics)		
Operating temperature	-40 +105°C		
Operating humidity	0 98 % R.H. (no condensation)		
Life	typ. 30 Mio. movements (when operated without lever)		
Functional safety	If you need assistance in using our products in safety-related systems, please contact us		
MTTF (IEC 60050)	843 years (one-channel) or 819 years (two-channel, per channel)		
Traceability	Serial number on type labeling: production batch of the sensor assembly and relevant sensor components		
EMC Compatibility			
ISO 10605 ESD (Handling/Component)	8 kV		
ISO 11452-2 Radiated HF-fields	100 V/m		
ISO 11452-5 Radiated HF-Fields, stripline	200 V/m		
CISPR 25 Radiated emission	Level 3		
ISO 7637-2 Transient Emissions	Level 3		
ISO 7637-2 Pulses on supply lines	(1, 2a, 2b, 3a, 3b, 4, 5) Level 4		
ISO 7637-3 Pulses on output lines	Level 4		
ISO 16750 Pulses on supply lines	Starting profile Level 4 @12 V / Level 3 @24 V		
	Exceeds E1 requirements		

FS = Full scale: Signal span according to electrical measuring range



### Connection Assignment

Connection Assignment		
Signal	Connector	
	code 5	
Supply voltage Ub	Pin 1	
GND	Pin 2	
CAN_H	Pin 3, pin 6	
CAN_L	Pin 4, pin 5	








# **Sensor Mounting**



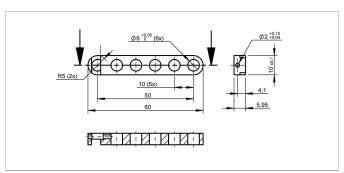

### Z-RSA-M01

Lever arm 50 mm for mounting at shaft with locking pin (included in delivery).


Further levers (geometry, materials...) on request.

Material	Aluminium, anodized
P/N	Туре
400105062	7-RSA-M01





### **Connector System MQS**











### EEM-33-34

Connector kit MQS including

- 1 plug socket (female), PBT GF15, AMP P/N 1-967616-1
- 6 tinned contacts for cable cross-section area 0.25 ... 0.35 mm² (AWG 22), AMP-P/N 963727-1 or 5-962885-1
- 6 single conductor sealings AMP P/N 967067-2

Operating temp. -40 ... +120°C

P/N	Туре	
400005666	EEM-33-34	

### EEM-33-24

Connector MQS AMP P/N 1-967616-1, 6-pin, PBT GF15, with lead wires 0.5 mm², PVC, 1 m, open ended

Operating temp. -40 ... +120°C Lead wires PVC, 6x0.5 mm

Lead wires	PVC, 6x0.5 mm <sup>2</sup>		
P/N	Туре	Length	
400108029	EEM-33-24	1 m	



Novotechnik Messwertaufnehmer OHG P.O.Box 4220 73745 Ostfildern (Germany) Horbstrasse 12 73760 Ostfildern (Germany) Phone +49 711 4489-0 Fax +49 711 4489-118 info@novotechnik.de www.novotechnik.de



© May 23, 2022