


Ordering Specifications

Ordering Specifications

Preferred types printed in bold

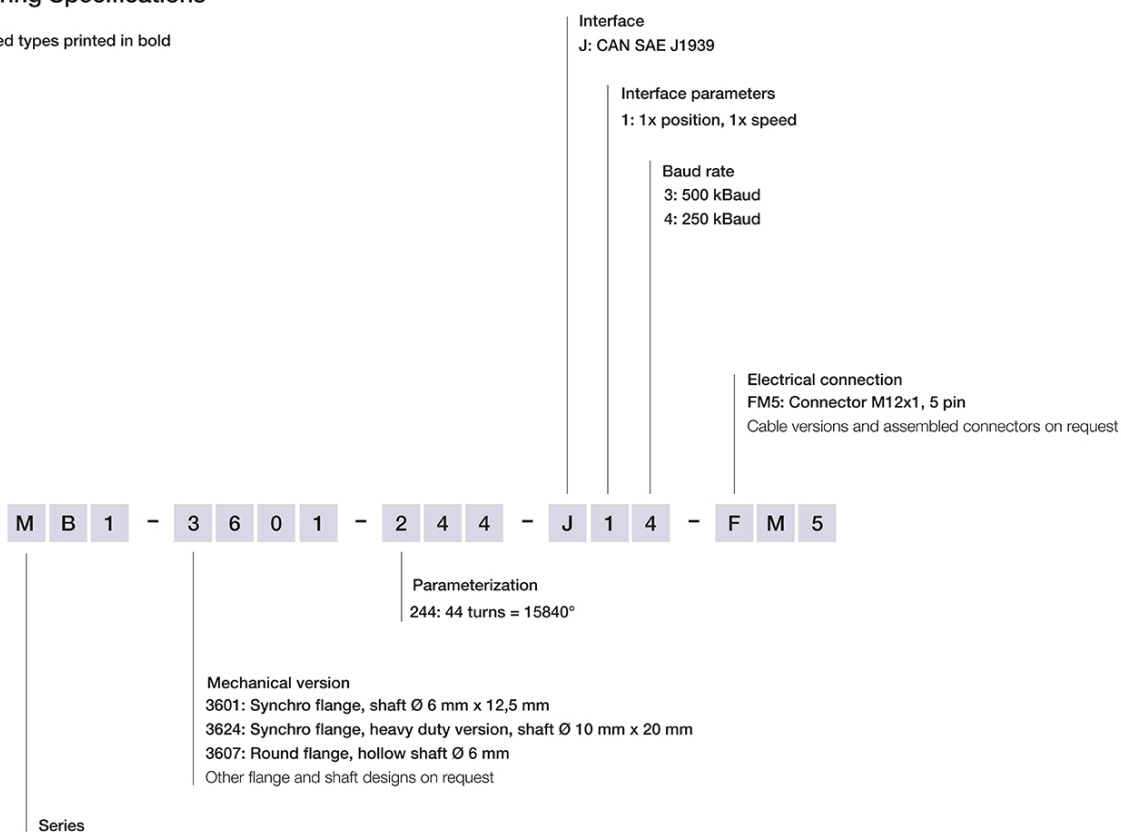


Accessories included in delivery

3x fixing clamp Z1-15

Drawing

CAD data see
www.novotechnik.de/en/download/cad-data/

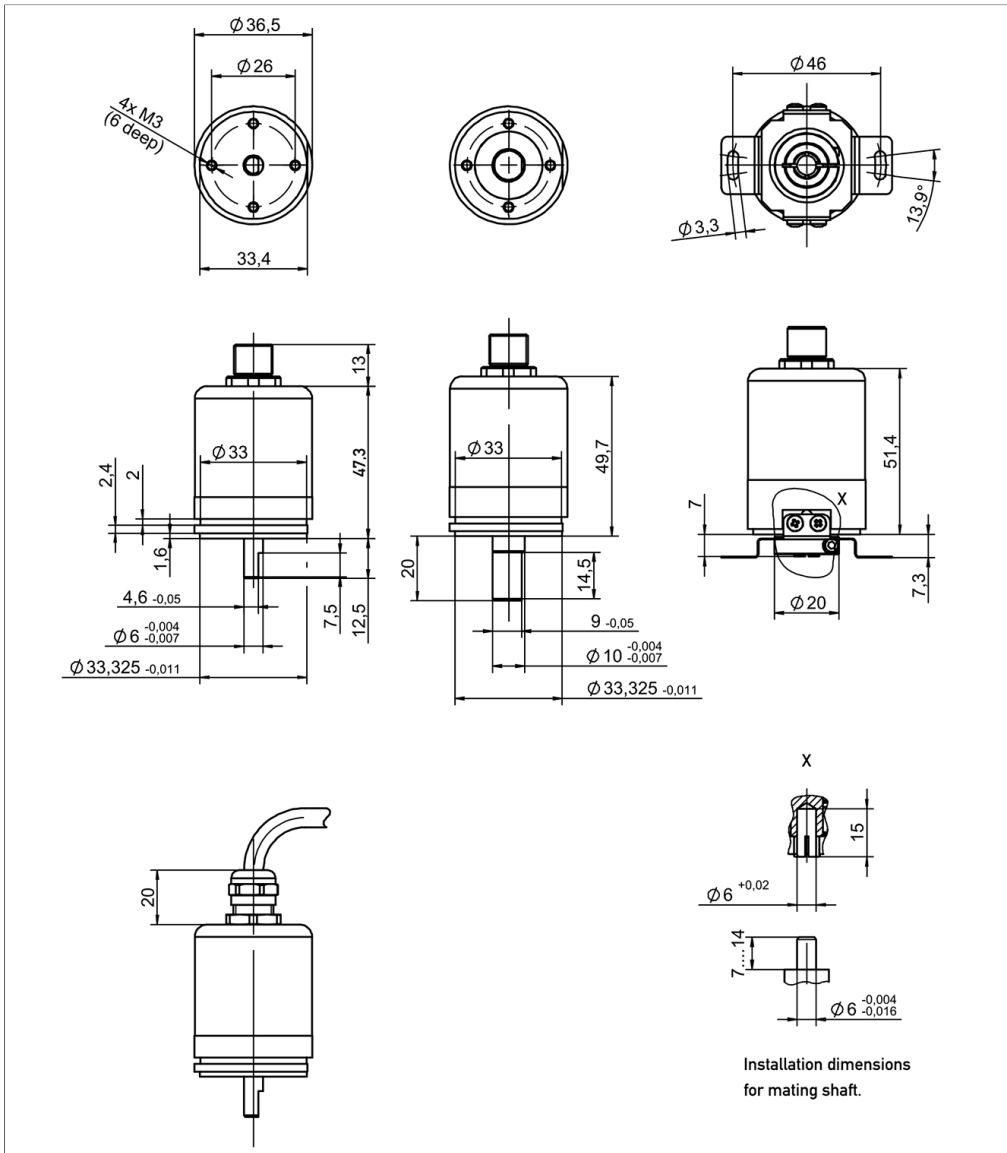

When the marking of the shaft is pointing towards the flattening on the housing flange, the sensor output is located on an integer turn position.

Technical Data




Type	MB1-36-_-_-_-J_-_-_-_- CAN SAE J1939		
Measured variables	Position, speed, temperature and supply voltage		
Measuring range	44 turns = 15840°		
Measuring range speed	0 ... 546 rpm		
Number of channels	1		
Protocol	CAN SAE J1939		
Programmable parameters	e.g. Preset, counting direction, resolution, baud rate, transmit mode, transmit cycle, source address		
Condition monitoring functions	Operating time, temperature, supply voltage		
Start-up time	≤ 70 ms		
Diagnosis	activated (in case of error, position signal is outside of the plausible signal range)		
Source Address	128 ... 247 (dynamic address claiming)		
Baud rate	250, 500 kBaud		
Signal propagation delay	< 0.3 ms		
Resolution position (across 360°)	16 bits		
Resolution speed	0.1°/s		
Linearity	≤ ±1°		
Repeatability	≤ ±0.1°		
Hysteresis	≤ ±0.5°		
Temperature error	±0.36°		
Supply voltage Ub	12/24 VDC (8 ... 32 VDC)		
Current consumption w/o load	≤ 60 mA		
Overvoltage protection	45 VDC (permanent)		
Polarity protection	yes (supply lines and outputs)		
Short circuit protection	yes (all outputs vs. GND and supply voltage)		
Insulation resistance (500 VDC)	≥ 10 MΩ		
Bus termination internal	w/o (internal load resistance 120 Ω on request)		
Environmental Data			
Type	Ø6 mm shaft MB1-3601-_-_-_-_-_-_-_-_-_-	Ø10 mm shaft Heavy Duty MB1-3624-_-_-_-_-_-_-_-_-_-	Ø6 mm hollow shaft MB1-3607-_-_-_-_-_-_-_-_-_-
Max. operational speed	12,000 rpm	6,000 rpm	12,000 rpm
Vibration IEC 60068-2-6	20 g, 5 ... 2000 Hz, Amax = 0.75 mm		
Shock IEC 60068-2-27	50 g, 6 ms		
Protection class ISO 20653	IP65 (shaft side) IP67 (housing incl. electronics)	IP67 (shaft side) IP69K (housing incl. electronics)	IP65 (shaft side) IP67 (housing incl. electronics)
Operating temperature	-30 ... +85°C		
Insensitivity to magnetic DC fields	< 15 mT		
Bearing lifetime	typ. > 100 Mio. movements		
Functional safety	If you need assistance in using our products in safety-related systems, please contact us		
MTTF (IEC 60050)	440 years		
Traceability	Serial number on type labeling: production batch of the sensor assembly and relevant sensor components		
Conformity/Approval	CE, UKCA see https://www.novotechnik.de/en/downloads/certificates/declarations-of-conformity-eu/uk WEEE see https://www.novotechnik.de/en/downloads/certificates/eu-directive-weee/		
EMC Compatibility			
ISO 13766-1 Construction machinery			
ISO 14982 Agricult./forestry machines			
Emission/Immunity E1	E1 compliant		
EN 61000-4-2 ESD (contact/air discharge)	4 kV, 8 kV		
EN 61000-4-3 Electromagnetic fields (RFI)	30 V/m		
EN 61000-4-4 Fast transients (burst)	1 kV		
EN 61000-4-6 Cond. disturbances (HF fields)	10 V eff.		
EN 55016-2-3 Radiated disturbances	Industrial and residential area		



Important:
While operation, care should be taken not to rotate the sensor shaft below 0° or above 5760°. Refer to users manual.

Connection Assignment

Signal	Connector
Supply voltage Ub	Pin 2
GND	Pin 3
CAN_H	Pin 4
CAN_L	Pin 5
CAN_SHLD	Pin 1
	Connect cable shielding to protection earth (Industrial/CE) or GND (mobile applications)



Sensor Mounting

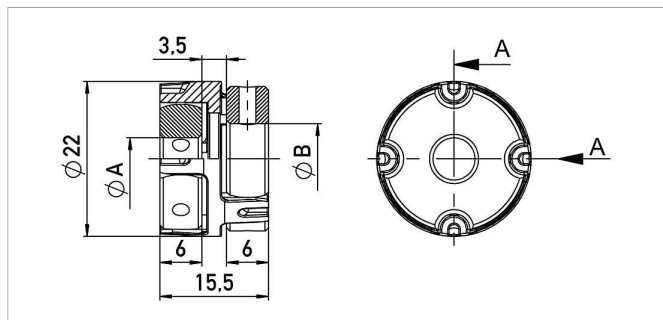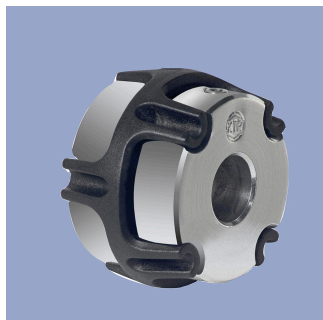

Z-106-G_

Backlash-free, double cardanic shaft coupling for $\varnothing 6$ mm to $\varnothing 6$ mm, $\varnothing 6.35$ mm or $\varnothing 10$ mm, mounting via 2 threaded pins with internal hexagon

Material Aluminium, PEEK

Operating temp. $-40 \dots +160^{\circ}\text{C}$



Transferable torque ≤ 1 Nm

torque

Displacement rad. ≤ 0.1 mm, angl. $\leq 0.45^{\circ}$

P/N	Type	$\varnothing A / \varnothing B$ [mm]
400103910	Z-106-G-6	6 / 6
400103912	Z-106-G-6,35	6 / 6.35
400103913	Z-106-G-10	6 / 10

Connector System M12





EEM-33-52
M12x1 Mating female/male connector, 5-pin, straight, A-coded, with molded cable, IP67, shielded (shield on knurl), CAN-Bus

Plug housing PUR
Cable sheath PUR, Ø = 6.7 mm, -25 ... +90°C (plug/socket) -20 ... +80°C (cable)

Lead wires PE, 2x0.25 mm²+2x0.34 mm²

P/N	Type	Length
400106373	EEM-33-52	5 m





EEM-33-49/50/51
M12x1 Mating female connector, 5-pin, straight, A-coded, with molded cable, IP67, shielded (shield on knurl), open ended

Plug housing TPU
Cable sheath PUR, Ø = 6.7 mm, -25 ... +90°C (socket) -20 ... +80°C (cable)

Lead wires PE, 2x0.25 mm²+2x0.34 mm²



P/N	Type	Length
400106368	EEM-33-49	2 m
400106371	EEM-33-50	5 m
400106372	EEM-33-51	10 m



EEM-33-73
M12x1 Mating female connector, 5-pin, straight, A-coded, with coupling nut, screw termination, IP67, shieldable, CAN bus

Plug housing Metal, -40 ... +85°C
For wire gauge 6 ... 8 mm, max. 0.75 mm²

P/N	Type
400005645	EEM-33-73





EEM-33-45
M12x1 splitter / T-connector, 5-pin, A-coded, IP68, 1:1 connection, female - male - female, CAN-Bus

Plug housing PUR, -25 ... +85°C

P/N	Type
400056145	EEM-33-45

Connector System M12



EEM-33-47
M12x1 terminating resistor, 5-pin, A-coded,
IP67, 120 Ω resistance, CAN-Bus

Plug housing	PUR, -25 ... +85°C
P/N	Type
400056147	EEM-33-47

IP67 Protection class IP67 DIN EN 60529

IP68 Protection class IP68 DIN EN 60529

Very good Electromagnetic Compatibility (EMC) and shield systems

Very good resistance to oils, coolants and lubricants

C Suited for applications in dragchains

UL UL - approved

CAN-Bus

Novotechnik
Messwertaufnehmer OHG
P.O.Box 4220
73745 Ostfildern (Germany)
Horbstrasse 12
73760 Ostfildern (Germany)
Phone +49 711 4489-0
Fax +49 711 4489-118
info@novotechnik.de
www.novotechnik.de



© Jun 6, 2025

The specifications contained in our datasheets are intended solely for informational purposes. The documented specification values are based on ideal operational and environmental conditions and can vary significantly depending on the actual customer application. Using our products at or close to one or more of the specified performance ranges can lead to limitations regarding other performance parameters. It is therefore necessary that the end user verifies relevant performance parameters in the intended application. We reserve the right to change product specifications without notice.