


Siedle Group

### Short Stroke Transducer Potentiometric

TR/TRS Spring-loaded



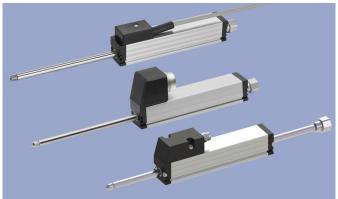

### **Special Features**

- Extremely compact design 18 x 18 mm
- With internal return spring
- Long life up to 100 million movements
- $\bullet$  Outstanding linearity up to ±0.05 %
- Repeatability to ±0.002 mm
- Actuating shaft with double-sided support
- Compatible to standard probe tips
- Insensitive to shock and vibration
- Optionally cable or plug connection

• Series T/TS with positive coupling, series TE1 with integrated signal processing for normalized outputs (current or voltage) or inductive series LS1 in same design see separate data sheets

### Applications

- Measuring/control technology
- Manufacturing Engineering (woodwork machines, riveting machines, packaging machines, welding machines)
- Assembly/test devices
- Medical appliances
- Building automation

Compact spring-loaded transducer with proven conductive-plastic technology.

Characteristic for the robust design is the double-sided support of the actuating rod. This bearing allows high lateral forces on the tip of the rod which may occur during scanning of cams or wedge plates.

Signal conditioners or high impedance voltage inputs are used for electrical connection of these potentiometers.

Description						
Material	Housing: aluminium AIMgSi, anodized					
	Actuating rod: stainless steel AISI 303, 1.4305, with anti-twist safeguard, internal thread M2.5x6					
Mounting	Adjustable clamps 2x Z-45 and 4x cylinder screws M4x10 DIN EN ISO 1207 (included in delivery)					
Fastening torque of mounting	max. 140 Ncm					
Bearing	Double-sided DU glide bearings					
Probe tip	Stainless steel with external thread M2.5 and pressed-in hardened metal ball (included in delivery)					
Resistance element	Conductive plastic					
Wiper	Precious metal multi-finger wiper, elastomer damped					
Electrical connection	Cable 3x 0.14 mm <sup>2</sup> (AW	Cable 3x 0.14 mm² (AWG 26), PVC, shielded, L = 2 m / Connector M8x1, 3-pin / Connector M16x0.75 (IEC 130-9), 5-pin				
Mechanical Data						
Туре	TR/TRS-0010	TR/TRS-0025	TR/TRS-0050	TR/TRS-0075	TR/TRS-0100	
Dimensions	See dimension drawing					
Length of housing (dimension A +1 mm)	48 mm	63 mm	94.4 mm	134.4 mm	166 mm	
Mechanical travel (dim. B ±1.5 mm)	15 mm	30 mm	55 mm	80 mm	105 mm	
Flange nut SW-10 (dimension C)	7 mm	12 mm	12 mm	12 mm	12 mm	
Excess length of push rod in end position	6 mm	32 mm	32 mm	32 mm	32 mm	
(dimension D)						
Weight (cable/connector version)	80/- g	120/74 g	150/100 g	180/128 g	200/150 g	
Weight actuating rod with wiper	18 g	25 g	36 g	48 g	57 g	
Operating force, horizontal	≤ 3.5 / 5 N	≤ 2.5 / 5 N	≤ 2.5 / 5 N	≤ 2.5 / 5 N	≤ 2.5 / 5 N	
(extended/retracted)						
Operating force to end stop	max 5 N					
Max. operating frequency*	20 Hz	18 Hz	14 Hz	11 Hz	10 Hz	
	*) Data refer to critical application "probe tip upwards"					



# Ordering Specifications


P/N	Туре	Defined electr. measuring	Electrical connection	Independent linearity	
		range			
400023260	TR-0010	0 10 mm	Cable	≤ ±0.25 %FS	Preferred type
400023261	TR-0025	0 25 mm	Cable	≤ ±0.2 %FS	Preferred type
400023262	TR-0050	0 50 mm	Cable	≤ ±0.15 %FS	Preferred type
400023263	TR-0075	0 75 mm	Cable	≤ ±0.1 %FS	Preferred type
400023264	TR-0100	0 100 mm	Cable	≤ ±0.075 %FS	Preferred type
400107044	TRS-0010-101	0 10 mm	Connector M8	≤ ±0.25 %FS	Preferred type
400107045	TRS-0025-101	0 25 mm	Connector M8	≤ ±0.2 %FS	Preferred type
400107047	TRS-0050-101	0 50 mm	Connector M8	≤ ±0.15 %FS	Preferred type
400107051	TRS-0075-101	0 75 mm	Connector M8	≤ ±0.1 %FS	Preferred type
400107053	TRS-0100-101	0 100 mm	Connector M8	≤ ±0.075 %FS	Preferred type
400023271	TRS-0025	0 25 mm	Connector M16	≤ ±0.2 %FS	Preferred type
400023272	TRS-0050	0 50 mm	Connector M16	≤ ±0.15 %FS	Preferred type
400023273	TRS-0075	0 75 mm	Connector M16	≤ ±0.1 %FS	Preferred type
400023274	TRS-0100	0 100 mm	Connector M16	≤ ±0.075 %FS	Preferred type
400023265	TR-00251	0 25 mm	Cable	≤ ±0.1 %FS	
400023266	TR-0050-1	0 50 mm	Cable	≤ ±0.1 %FS	
400023267	TR-0050-05	0 50 mm	Cable	≤ ±0.05 %FS	
400023268	TR-0075-05	0 75 mm	Cable	≤ ±0.05 %FS	
400023269	TR-0100-05	0 100 mm	Cable	≤ ±0.05 %FS	
400107046	TRS-0025-1-101	0 25 mm	Connector M8	≤ ±0.1 %FS	
400107050	TRS-0050-1-101	0 50 mm	Connector M8	≤ ±0.1 %FS	
400107049	TRS-0050-05-101	0 50 mm	Connector M8	≤ ±0.05 %FS	
400107052	TRS-0075-05-101	0 75 mm	Connector M8	≤ ±0.05 %FS	
400107054	TRS-0100-05-101	0 100 mm	Connector M8	≤ ±0.05 %FS	
400023275	TRS-0025-1	0 25 mm	Connector M16	≤ ±0.1 %FS	
400023276	TRS-0050-1	0 50 mm	Connector M16	≤ ±0.1 %FS	
400023277	TRS-0050-05	0 50 mm	Connector M16	≤ ±0.05 %FS	
400023278	TRS-0075-05	0 75 mm	Connector M16	≤ ±0.05 %FS	
400023279	TRS-0100-05	0 100 mm	Connector M16	≤ ±0.05 %FS	

Accessories included in delivery • Adjustable clamps 2x Z-45 and 4x cylinder screws M4x10 DIN EN ISO 1207

Probe tip



## Drawing

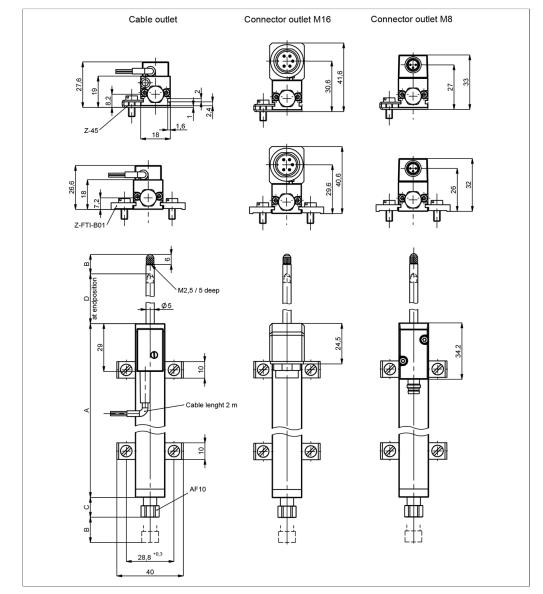

CAD data see www.novotechnik.de/en/download/caddata/



## **Technical Data**

Туре	TR/TRS-0010	TR/TRS-0025	TR/TRS-0050	TR/TRS-0075	TR/TRS-0100		
Electrical measuring range	0 12 mm	0 27 mm	0 52 mm	0 77 mm	0 102 mm		
Defined electr. measuring range	0 10 mm	0 25 mm	0 50 mm	0 75 mm	0 100 mm		
Output	Voltage divider						
Resistance value	1 kΩ	1 kΩ	5 kΩ	5 kΩ	5 kΩ		
Resistance tolerance	± 20 %						
Independent linearity	≤ ±0.25 %FS Pref.version	≤ ±0.2 %FS Pref.version	≤ ±0.15 %FS Pref. version	≤ ±0.1 %FS Pref.version	≤ ±0.075 %FS Pref.version		
		≤ ±0.1 %FS	≤ ±0.1 %FS	≤ ±0.05 %FS	≤ ±0.05 %FS		
			≤ ±0.05 %FS				
Repeatability	≤ ±0.002 mm						
Recommended operating wiper current	≤ 1 µA						
Max. wiper current in case of malfunction	10 mA						
Max. supply voltage Ub	24 VDC	42 VDC	42 VDC	42 VDC	42 VDC		
Effective temp. coefficient of	typ. 5 ppm/K						
the output-to-applied voltage ratio							
Insulation resistance (500 VDC)	≥ 10 MΩ						
Dielectric strength (500 VAC, 50 Hz)	≤ 100 µA						
Environmental Data							
Vibration IEC 60068-2-6	20 g, 5 2000 Hz, Amax = 0.75 mm						
Shock IEC 60068-2-27	50 g, 11 ms						
Protection class DIN EN 60529	IP40						
Operating temperature	-30 +100°C, -30 +85°C (connector M8)						
Operating humidity	095 % R.H. (no condensation)						
Life	> 100 Mio. movements						
Functional safety	If you need assistance in using our products in safety-related systems, please contact us						
Traceability	Serial number on type labeling: production batch of the sensor assembly and relevant sensor components						

Important: All values specified in this data sheet for linearity, lifetime and temperature coefficient are only valid for a sensor used as a voltage divider with virtually no load applied to the wiper (le  $\leq$  1 µA).

### **Connection Assignment**


Signal	Cable	Connector M8	Connector M16		
Connection 1	BN	Pin 3	Pin 1		
Connection 2 Signal output	RD	Pin 4	Pin 2		
Connection 3	OG	Pin 1	Pin 3		
Do not connect	-	-	Pin 4		
Do not connect	-	-	Pin 5		
	Direction of output characteristic while extending the rod:				
	increasing: supply voltage l	increasing: supply voltage Ub at connection 3			

falling: supply voltage Ub at connection 1






## **Technical Data**

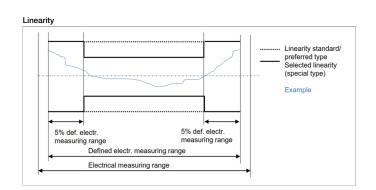




## **Sensor Mounting**

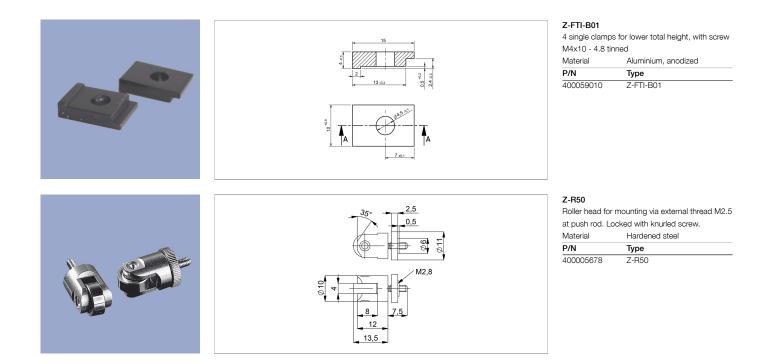




# Connector System M16

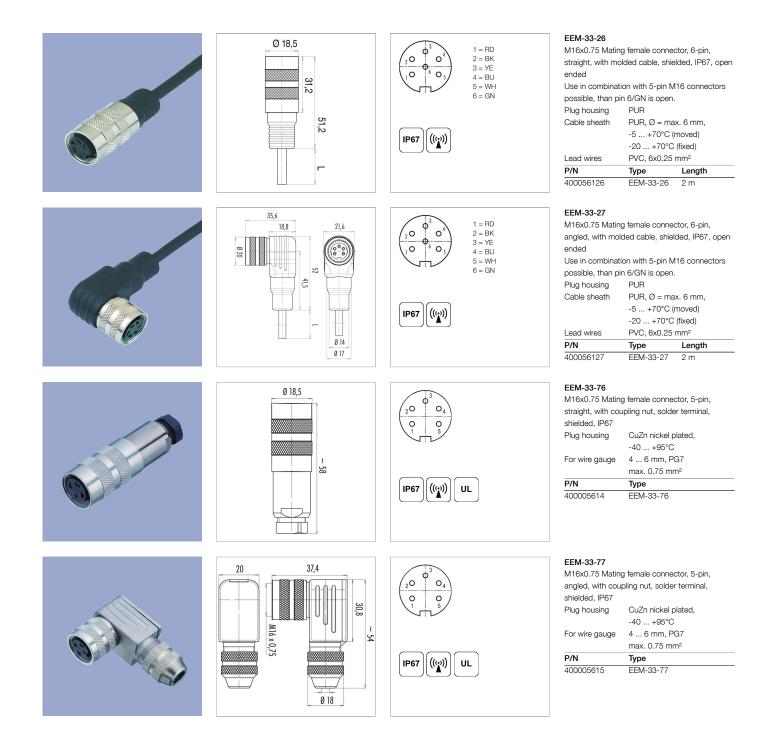



## **Connector System** M16

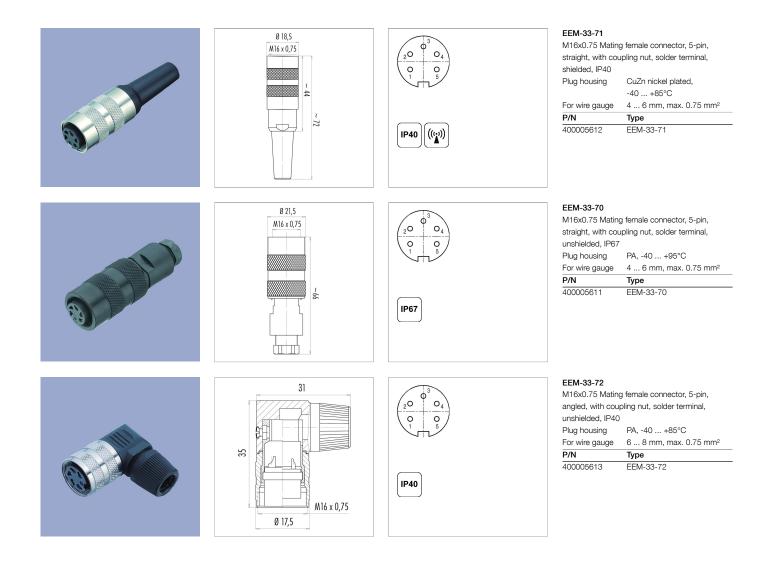



IP68

Protection class IP67 DIN EN 60529

Protection class IP68 DIN EN 60529



Very good Electromagnetic Compatibiliy (EMC) and shield systems

Very good resistance to oils, coolants and lubricants






Page 8




## Connector System M8

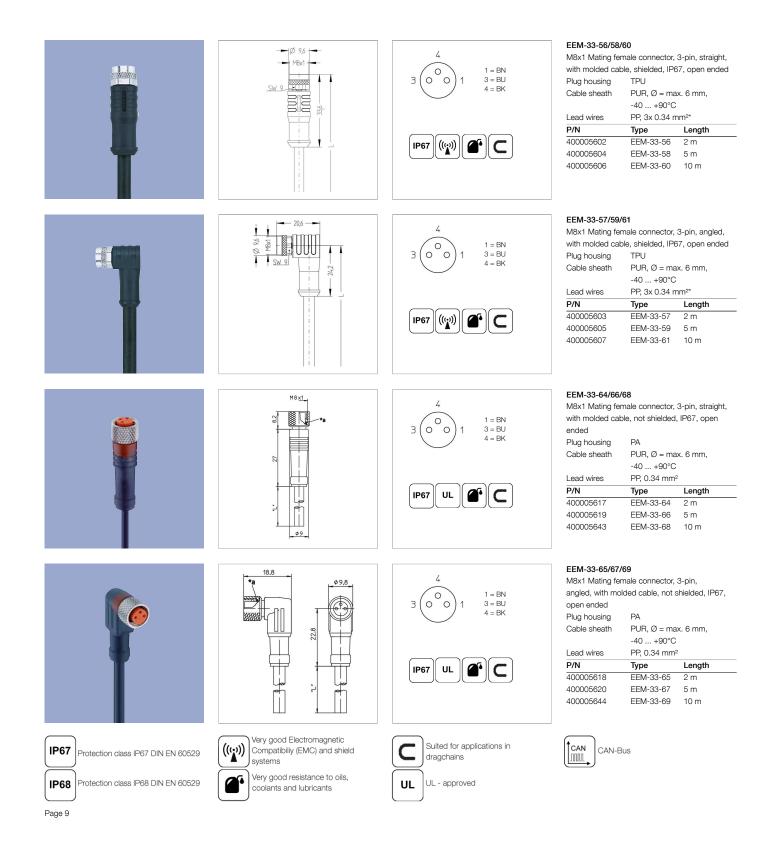




## Signal Processing

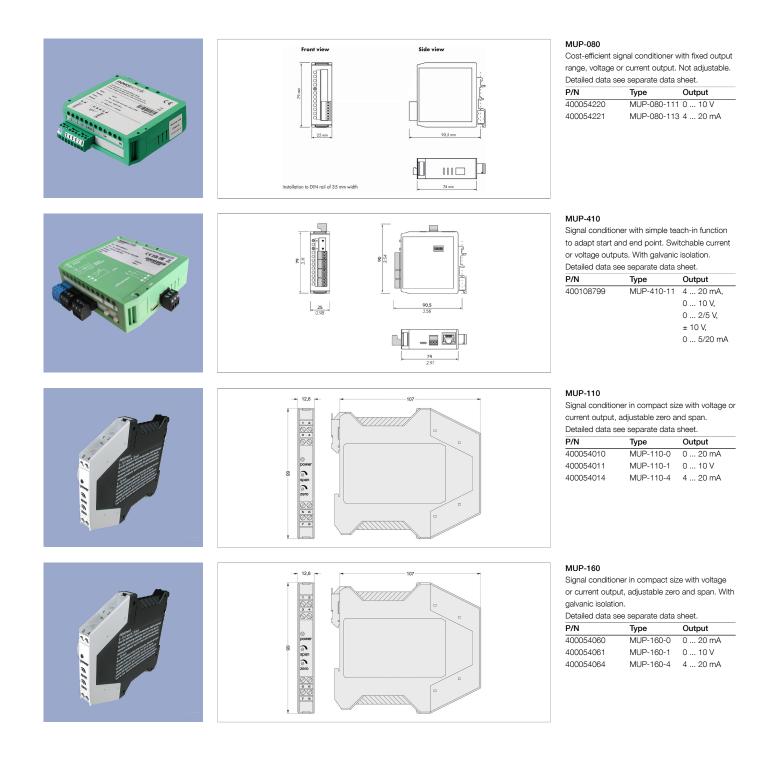



## **Signal Processing**

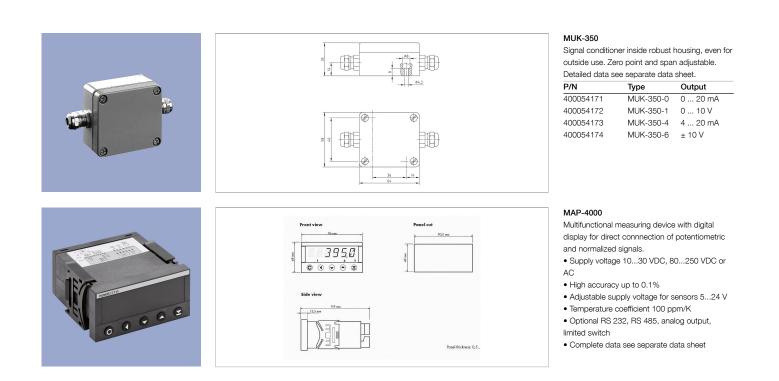



Novotechnik Messwertaufnehmer OHG P.O.Box 4220 73745 Ostfildern (Germany) Horbstrasse 12 73760 Ostfildern (Germany) Phone +49 711 4489-0 Fax +49 711 4489-118 info@novotechnik.de www.novotechnik.de



© Mar 13, 2024

The specifications contained in our datasheets are intended solely for informational purposes. The documented specification values are based on ideal operational and environmental conditions and can vary significantly depending on the actual customer application. Using our products at or close to one or more of the specified performance ranges can lead to limitations regarding other performance parameters. It is therefore necessary that the end user verifies relevant performance parameters in the intended application. We reserve the right to change product specifications without notice.